

**SPECIFICATIONS
AND
CONTRACT DOCUMENTS**

***2025 LMIG &
2025 Supplemental LMIG***

IN

**City of Butler,
Taylor County**

October, 2025



104 C Gunn Road
Centerville, GA 31028
Phone: (478) 953-1228
Fax: (478) 953-1248
SEC Project#: 1324

TABLE OF CONTENTS

CONTRACT DOCUMENTS

Advertisement for Bids	AB-1
Instructions to Bidders	IB-1
Bid Form	BF-1
Bid Bond	BB-1
Qualifications of Bidder.....	QB-1
Certification of Non-segregated Facilities.....	CNF-1
Contractor Certification	CC-1
Agreement	A-1
Performance Bond	PB-1
Payment Bond.....	PmB-1
Certificate of Owner's Attorney.....	COA-1
General Conditions	GC-1
Supplementary Conditions.....	SC-1

ADVERTISEMENT OF BIDS
2025 LMIG & 2025 Supplemental LMIG
CITY OF BUTLER, GEORGIA

Sealed Bids: The City of Butler will accept sealed proposals for 2025 LMIG & 2025 Supplemental LMIG at the City Hall, 12 Cedar Street, Office of City Clerk, Butler, Georgia, until 10:30 am local time on November 21, 2025 where bids will be opened and publicly read aloud. No bid may be withdrawn after the closing time for the receipt of bids for a period of sixty (60) calendar days after bid opening date.

Project Description: The proposed construction consists of furnishing all materials and equipment and performing all labor necessary to complete the resurfacing of Marshall Street, Kings Lane, Sandy Run and restripe Bell Street, East Venus Street, & Gloria Street. Work includes patching, resurfacing, and striping work on these streets. All work will be in accordance with the Georgia Department of Transportation standard specifications and supplemental specifications (latest edition), the Georgia Manual for Erosion and Sediment Control (latest edition), Manual on Uniform Traffic Control Devices, and the City of Butler. The proposed construction will be awarded in one contract.

Plans, Specifications, and Contract Documents: Contract documents are available for review at Butler City Hall, during regular business hours. Copies may be obtained from Saunders Engineering Consultants, Inc., 104-C Gunn Road, Centerville, Georgia 31028, Phone Number (478) 953-1228, Fax Number (478) 953-1248, upon payment of \$25.00 for each set (non-refundable).

Bonds: All bids must be accompanied by a Bid Bond in the amount not less than ten percent (10%) of the Total Base Bid. Performance and Payment Bond, each in the amount of one hundred percent (100%) of the total contract amount, will be required of the successful bidder. Bonds must be written by an acceptable Surety Company licensed to do business in the State of Georgia and listed in the Department of Treasury, Circular 570, latest edition.

Permits: The successful bidder shall secure and pay for all permits, assessments, charges or fees required in connection with the proposed construction including any NPDES Permitting.

The City of Butler reserves the right to reject any or all bids and to waive informalities or technicalities or to re-advertise as appropriate.

City of Butler

By: Mr. Barry Whitley
Mayor

INSTRUCTIONS TO BIDDERS

INDEX

Defined Terms.....	IB-2
Copies of Bidding Documents.....	IB-2
Examination of Contract Documents and Site	IB-2
Interpretations and Addenda	IB-4
Contract Time.....	IB-4
Liquidated Damages	IB-4
Substitute or “Or Equal” Items	IB-4
Subcontractors, Suppliers and Others.....	IB-5
Bid Form	IB-5
Submission of Bids	IB-6
Modification and Withdrawal of Bids	IB-6
Opening of Bids	IB-6
Bid to Remain Subject To Acceptance.....	IB-6
Award of Contract.....	IB-7
Contract Security.....	IB-7
Signing of Agreement.....	IB-8
Non-Segregated Facilities.....	IB-8
Laws and Regulations	IB-8

4. INTERPRETATIONS AND ADDENDA.

All questions about the meaning or intent of the Contract Documents are to be directed to Engineer. Interpretations or clarifications considered necessary by Engineer in response to such questions will be issued by Addenda mailed or delivered to all parties recorded by Engineer as having received the Bidding Documents. Questions received less than three days (72 hours) prior to the date for opening of Bids may not be answered. Only questions answered by formal written Addenda will be binding. Oral and other interpretations or clarifications will be without legal effect.

Addenda may also be issued to modify the Bidding Documents as deemed advisable by Owner or Engineer.

5. CONTRACT TIME.

The numbers of days within which, or the dates by which, the Work is to be substantially completed and also completed and ready for final payment are set forth in the Bid Form and the Agreement. The Successful Bidder has fifteen days after the Notice of Award to execute and deliver the Agreement and furnish the required contract security to the Owner.

6. LIQUIDATED DAMAGES.

OWNER and CONTRACTOR recognize that time is of the essence of this Agreement and that OWNER will suffer financial loss if the work is not completed within the times specified in set forth in the Bid Form and the Agreement, plus any extensions thereof allowed in accordance with Article 12 of the General Conditions. They also recognize the delays, expense and difficulties involving in proving in a legal proceeding the actual loss suffered by OWNER if the work is not completed on time. Accordingly, instead of requiring any such proof, OWNER and CONTRACTOR agree that as liquidated damages for delay (but not as a penalty) CONTRACTOR shall pay OWNER Two Hundred and 00/100 Dollars (\$200.00) for each day that expires after the time specified in set forth in the Bid Form and the Agreement.

7. SUBSTITUTE OR "OR-EQUAL" ITEMS.

Whenever a material, article or piece of equipment is identified on the plans or in the specifications by reference to manufacturer's or vendor's names, trade names, catalogue numbers, etc., it is intended to establish a standard; and if an equal can perform adequately the duties imposed by the general design, it will be considered equally acceptable provided the material, article, or equipment so proposed, is, in the opinion of the Engineer, of equal substance and function. "or Equal" equipment, as offered by the Bidder, may be written into the Bid Data as a Substitute. Submittals on proposed "Or Equal" equipment by the Bidder shall be required for review by the Engineer and Owner as provided in paragraph 4 of the Supplementary Conditions.

8. SUBCONTRACTORS, SUPPLIERS AND OTHERS.

If the Supplementary Conditions require the identity of certain Subcontractors, Suppliers and other persons and organizations (including those who are to furnish the principal items of material and equipment) to be submitted to Owner in advance of the specified date prior to the Effective Date of the Agreement, the apparent Successful Bidder, and any other Bidder so requested, shall within seven days after the Bid opening submit to Owner a list

BIDDER has studied carefully all reports and drawings of subsurface conditions and drawings of physical conditions which are identified in the Supplementary Conditions as provided in paragraph 4.2 of the General Conditions, and accepts the determination set forth in paragraph 5 of the Supplementary Conditions of the extent of the technical data contained in such reports and drawings upon which BIDDER is entitled to rely.

BIDDER has obtained and carefully studied (or assumes responsibility for obtaining and carefully studying) all such examinations, investigations, explorations, tests and studies (in addition to or to supplement those referred to in (c) above) which pertain to the subsurface or physical conditions at the site or otherwise may affect the cost, progress, performance or furnishing of the Work as BIDDER considers necessary for the performance or furnishing of the Work at the Contract Price, within the Contract Time and in accordance with the other terms and conditions of the Contract Documents, including specifically the provisions of paragraph 4.2 of the General Conditions; and no additional examinations, investigations, explorations, tests, reports or similar information or data are or will be required by BIDDER for such purposes.

BIDDER has reviewed and checked all information and data shown or indicated on the Contract Documents with respect to existing Underground Facilities at or contiguous to the site and assumes responsibility for the accurate location of said Underground Facilities. No additional examinations, investigations, explorations, tests, reports or similar information or data in respect of said Underground Facilities are or will be required by BIDDER in order to perform and furnish the Work at the Contract Price, within the Contract Time and in accordance with the other terms and conditions of the Contract Documents, including specifically the provisions of paragraph 4.3 of the General Conditions.

BIDDER has correlated the results of all such observations, examinations, investigations, explorations, tests, reports and studies with the terms and conditions of the Contract Documents.

BIDDER has given ENGINEER written notice of all conflicts, errors or discrepancies that it has discovered in the Contract Documents and the written resolution thereof by ENGINEER is acceptable to BIDDER.

This Bid is genuine and not made in the interest of or on behalf of any undisclosed person, firm or corporation and is not submitted in conformity with an agreement or rules of any group, association, organization or corporation; BIDDER has not directly or indirectly induced or solicited any other corporation to refrain from bidding; and BIDDER has not sought by collusion to obtain for itself any advantage over any other BIDDER or over OWNER.

BIDDER agrees to commence work under this Agreement on or before a date to be specified in a written "Notice to Proceed" of the OWNER and to fully **complete the work within 90 consecutive calendar days from the "Notice to Proceed" date.**

BIDDER accepts the provisions of the Agreement as to liquidated damages in the event of failure to complete the Work on time.

Item	Qty	Unit	Description	Unit Cost	Total Cost
Marshall Street North Resurfacing (LMIG)					
1	1	Lump	150-1000 Traffic Control	\$ 535.00	\$ 535.00
2	89	Ton	402-3130 Recycled Asph Conc 12.5mm Superpave, GP 2 Only, Incl Bitum	121.00	10,769.00
3	40	Gal	413-1000 Bitum Tack Coat	2.80	112.00
4	970	LF	653-1502 Thermo Solid Traff Stripe, 5 In, Yellow	0.72	698.40
5	24	LF	653-1704 Thermo Traf Stripe, 24 In	15.50	372.00
			Subtotal Marshall Street North		\$ 12,486.40
Bell Street Re-Striping (LMIG)					
6	2250	LF	653-1502 Thermo Solid Traff Stripe, 5 In, Yellow	0.72	1,620.00
7	12	LF	653-1704 Thermo Traf Stripe, 24 In	15.50	186.00
			Subtotal Bell Street		\$ 1,806.00
East Venus Street Re-Striping (LMIG)					
8	2250	LF	653-1502 Thermo Solid Traff Stripe, 5 In, Yellow	0.72	1,620.00
9	12	LF	653-1704 Thermo Traf Stripe, 24 In	15.50	186.00
			Subtotal East Venus Street		\$ 1,806.00
Kings Lane Resurfacing (LMIG)					
10	1	Lump	150-1000 Traffic Control	\$ 827.00	\$ 827.00
11	230	Ton	402-3130 Recycled Asph Conc 12.5mm Superpave, GP 2 Only, Incl Bitum	121.00	27,830.00
12	100	Gal	413-1000 Bitum Tack Coat	2.80	280.00
13	2500	LF	653-1502 Thermo Solid Traff Stripe, 5 In, Yellow	0.72	1,800.00
14	14	LF	653-1704 Thermo Traf Stripe, 24 In	15.50	217.00
			Subtotal Kings Lane		\$ 30,954.00
Gloria Street Re-Striping (LMIG)					
15	3760	LF	653-1502 Thermo Solid Traff Stripe, 5 In, Yellow	0.72	2,707.20
16	24	LF	653-1704 Thermo Traf Stripe, 24 In	15.50	372.00
			Subtotal Gloria Street		\$ 3,079.20
Marshall Street North Resurfacing (LRA)					
17	1	Lump	150-1000 Traffic Control	\$ 652.00	\$ 652.00
18	106	Ton	402-3130 Recycled Asph Conc 12.5mm Superpave, GP 2 Only, Incl Bitum	121.00	12,826.00
19	45	Gal	413-1000 Bitum Tack Coat	2.80	126.00

20	1155	LF	653-1502 Thermo Solid Traff Stripe, 5 In, Yellow	\$ 0.72	\$ 831.60
			Marshall Street North (LRA)		\$ 14,435.60
			Sandy Run Resurfacing (LRA)		
21	1	Lump	150-1000 Traffic Control	\$ 634.00	\$ 634.00
22	230	Ton	402-3130 Recycled Asph Conc 12.5mm Superpave, GP 2 Only, Incl Bitum	\$ 121.00	\$ 27,830.00
23	100	Gal	413-1000 Bitum Tack Coat	\$ 2.80	\$ 280.00
24	2500	LF	653-1502 Thermo Solid Traff Stripe, 5 In, Yellow	\$ 0.72	\$ 1,800.00
25	14	LF	653-1704 Thermo Traf Stripe, 24 In	\$ 15.50	\$ 217.00
			Subtotal Sandy Run (LRA)		\$ 30,761.00
TOTAL PROJECT BID:				\$ 95,328.20	

Bidder agrees to furnish materials and equipment and to perform all labor necessary for **2025 LMIG & 2025 Supplemental LMIG** for the City of Butler, for the sum of \$95,328.20.

The above unit and lump sum prices shown shall include all labor, materials, bailing, shoring removal, overhead, profit, insurance, etc., to cover the finished work of the several kinds called for.

BIDDER understands that the OWNER reserves the right to reject any or all bids and to waive any informalities in the bidding.

BIDDER furthermore agrees that, in the case of a failure on his part to execute the Contract Agreement and Bonds within fifteen days after receipt of conformed contract documents for execution, the Bid Bond accompanying his bid and the monies payable thereon shall be paid into the funds of the OWNER as liquidated damages for such failures.

SUPPLEMENTARY CONDITIONS

INDEX

Supplementary Conditions.....	SC-2
Scope of the Work.....	SC-2
Construction Drawings	SC-2
Substitutions or "Or Equal"	SC-2
Reports and Drawings used by Engineer.....	SC-3
Sanitary Conveniences.....	SC-3
Utility Services.....	SC-3
Environmental Impact.....	SC-3
Construction Stakeout.....	SC-4
Utilities	SC-5
Adjustment of Discrepancies	SC-5
Restoration	SC-5
Maintenance During Construction.....	SC-5
Barricades, Danger, Warning and Detour Signs.....	SC-6
High Voltage Act	SC-6
Access for Inspection	SC-6
Insurance	SC-7
As-Built Information.....	SC-8
Certificates of Insurance	SC-8
Railroad Public Liability and Property Damage Liability Insurance	SC-8
Buy American	SC-8

22. DESCRIPTION OF WORK.

1. Marshall Street (0.09 miles) LMIG

From Edgewood Dr to Willow St

- Provide Traffic Control per the Manual on Uniform Traffic Control Devices, latest edition.
- Clip shoulders to remove existing grass and accumulated dirt along the existing edges of pavement.
- Apply 12.5 mm asphaltic surfacing at 165 lb/sy, per the Georgia Department of Transportation Specifications. Construct driveway turnouts per attached detail. Backfill shoulders per attached detail.
- Provide double yellow centerline stripe & 24" stop bar per the Georgia Department of Transportation Specifications.

2. Bell Street (0.20 miles) LMIG

From Venus Street to end of pavement

- Provide Traffic Control per the Manual on Uniform Traffic Control Devices, latest edition.
- Provide double yellow centerline stripe & 24" stop bar per the Georgia Department of Transportation Specifications.

3. East Venus Street (0.23 miles) LMIG

From State Route 3 to end of pavement

- Provide Traffic Control per the Manual on Uniform Traffic Control Devices, latest edition.
- Provide double yellow centerline stripe & 24" stop bar per the Georgia Department of Transportation Specifications.

4. Kings Lane (0.24 miles) LMIG

From Oak Street to end of pavement

- Provide Traffic Control per the Manual on Uniform Traffic Control Devices, latest edition.
- Clip shoulders to remove existing grass and accumulated dirt along the existing edges of pavement.
- Apply 12.5 mm asphaltic surfacing at 165 lb/sy, per the Georgia Department of Transportation Specifications. Construct driveway turnouts per attached detail. Backfill shoulders per attached detail.
- Provide double yellow centerline stripe & 24" stop bar per the Georgia Department of Transportation Specifications.

5. Gloria Street (0.21 miles) LMIG

From State Route 3 to Venus Street

- Provide Traffic Control per the Manual on Uniform Traffic Control Devices, latest edition.

- Provide double yellow centerline stripe & 24" stop bar per the Georgia Department of Transportation Specifications.

6. Marshall Street South (0.15 miles) LRA


From Edgewood Drive to Sandy Run

- Provide Traffic Control per the Manual on Uniform Traffic Control Devices, latest edition.
- Clip shoulders to remove existing grass and accumulated dirt along the existing edges of pavement.
- Apply 12.5 mm asphaltic surfacing at 165 lb/sy, per the Georgia Department of Transportation Specifications. Construct driveway turnouts per attached detail. Backfill shoulders per attached detail.
- Provide double yellow centerline stripe & 24" stop bar per the Georgia Department of Transportation Specifications.

7. Sandy Run (0.14 miles) LRA

From Rebecca Bergin to Beginning of Curve

- Provide Traffic Control per the Manual on Uniform Traffic Control Devices, latest edition.
- Clip shoulders to remove existing grass and accumulated dirt along the existing edges of pavement.
- Apply 12.5 mm asphaltic surfacing at 165 lb/sy, per the Georgia Department of Transportation Specifications. Construct driveway turnouts per attached detail. Backfill shoulders per attached detail.
- Provide double yellow centerline stripe per the Georgia Department of Transportation Specifications.

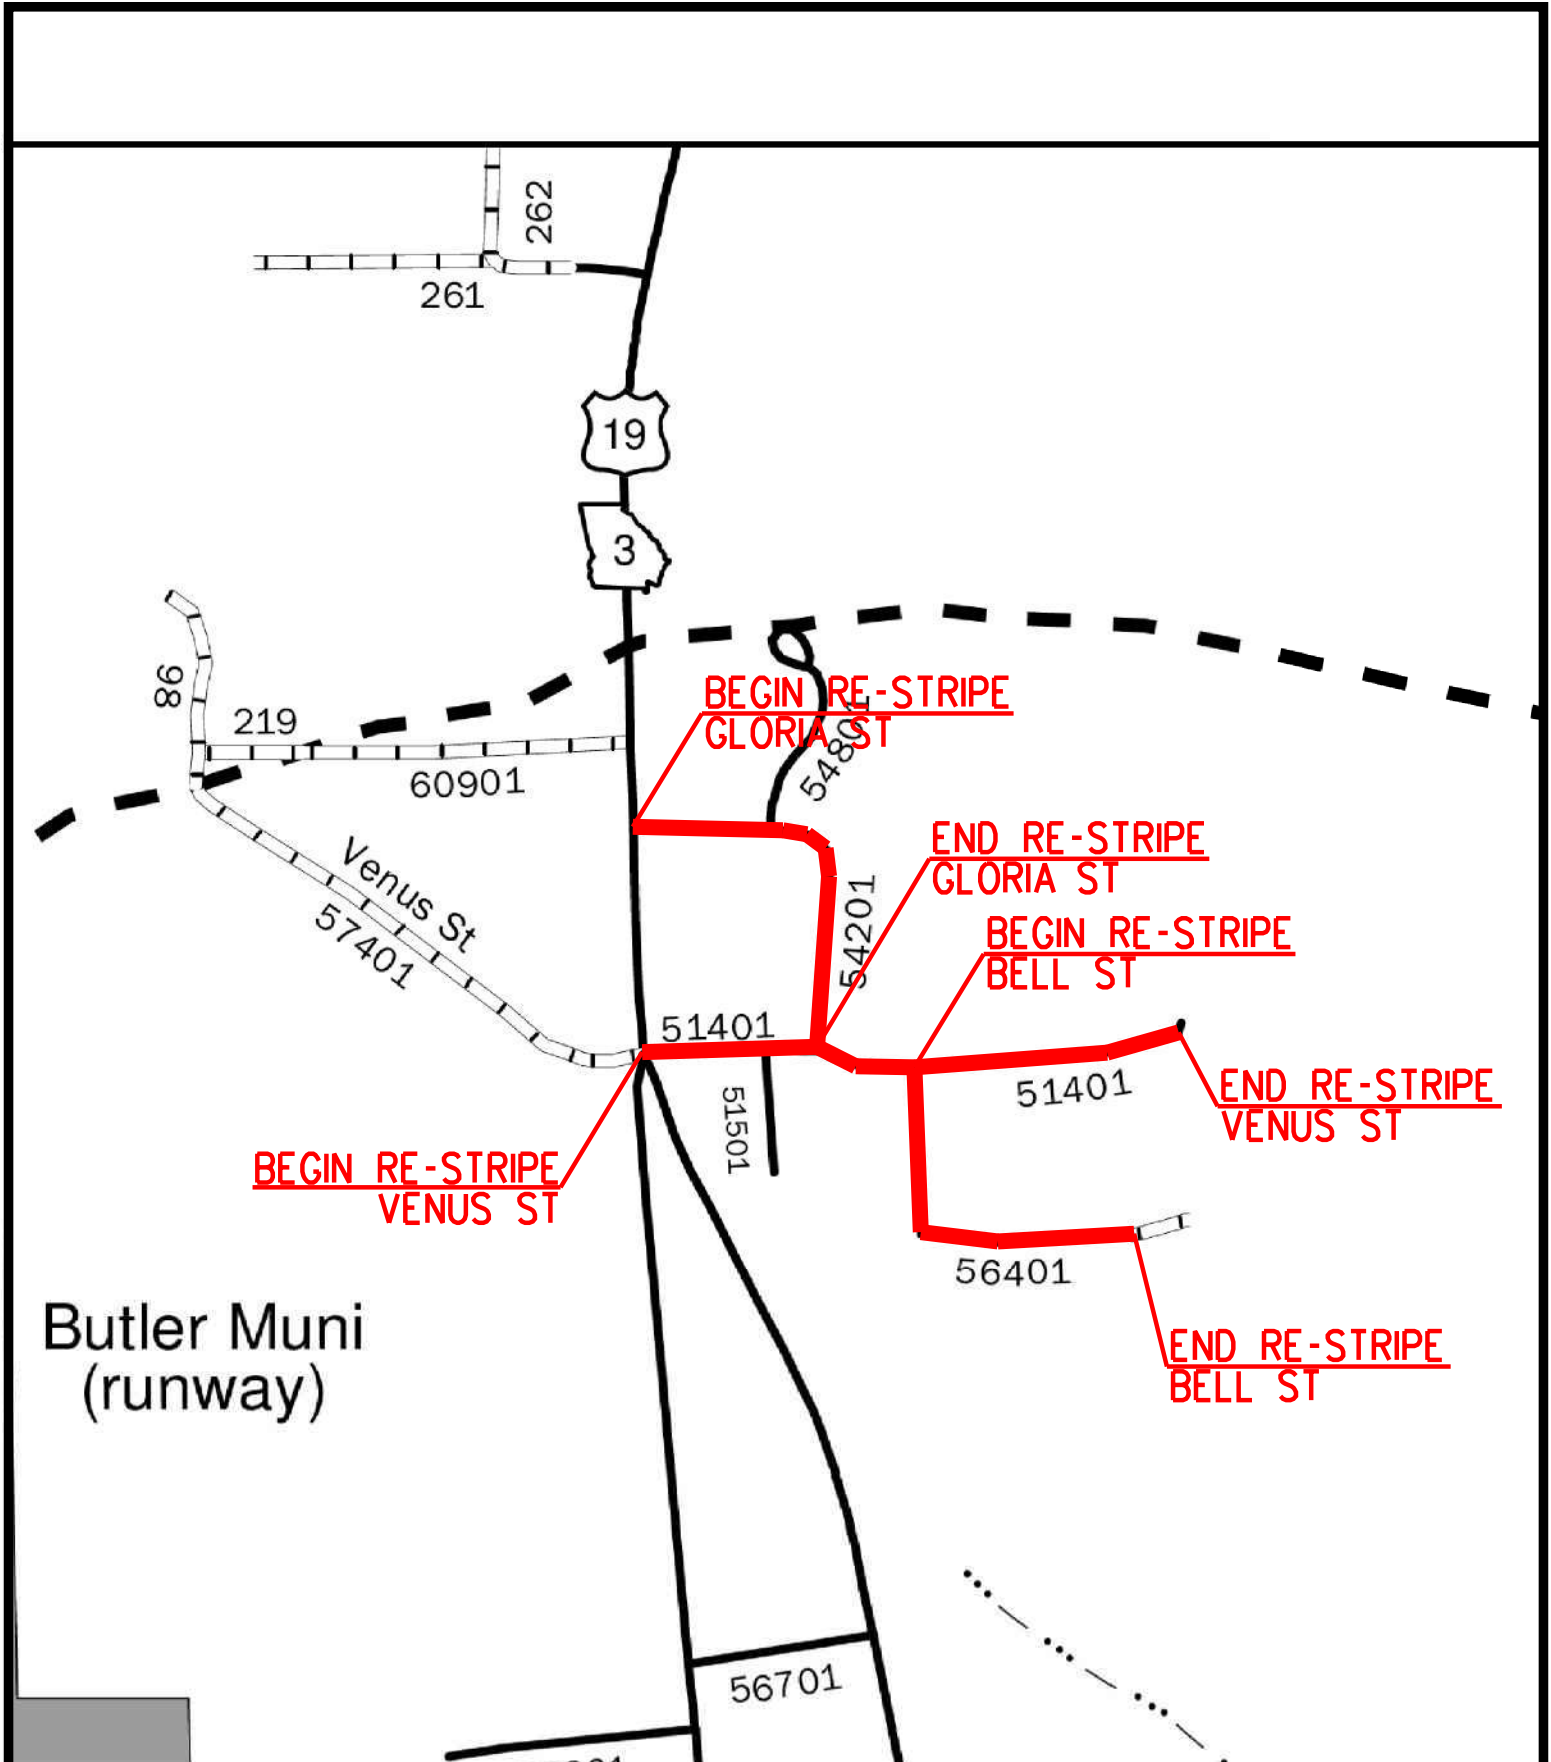

Saunders
Engineering
Consultants, Inc.


104-C Gunn Road, Centerville, GA 31028
(478) 953-1228 (478) 953-1248 Fax

Date: 10/20/25
Designed: RBS
Drawn: RBS
Checked: RBS
Project No: 1324

CITY OF BUTLER
2025 LMIG

LOCATION SKETCH

SHEET 1 OF 2

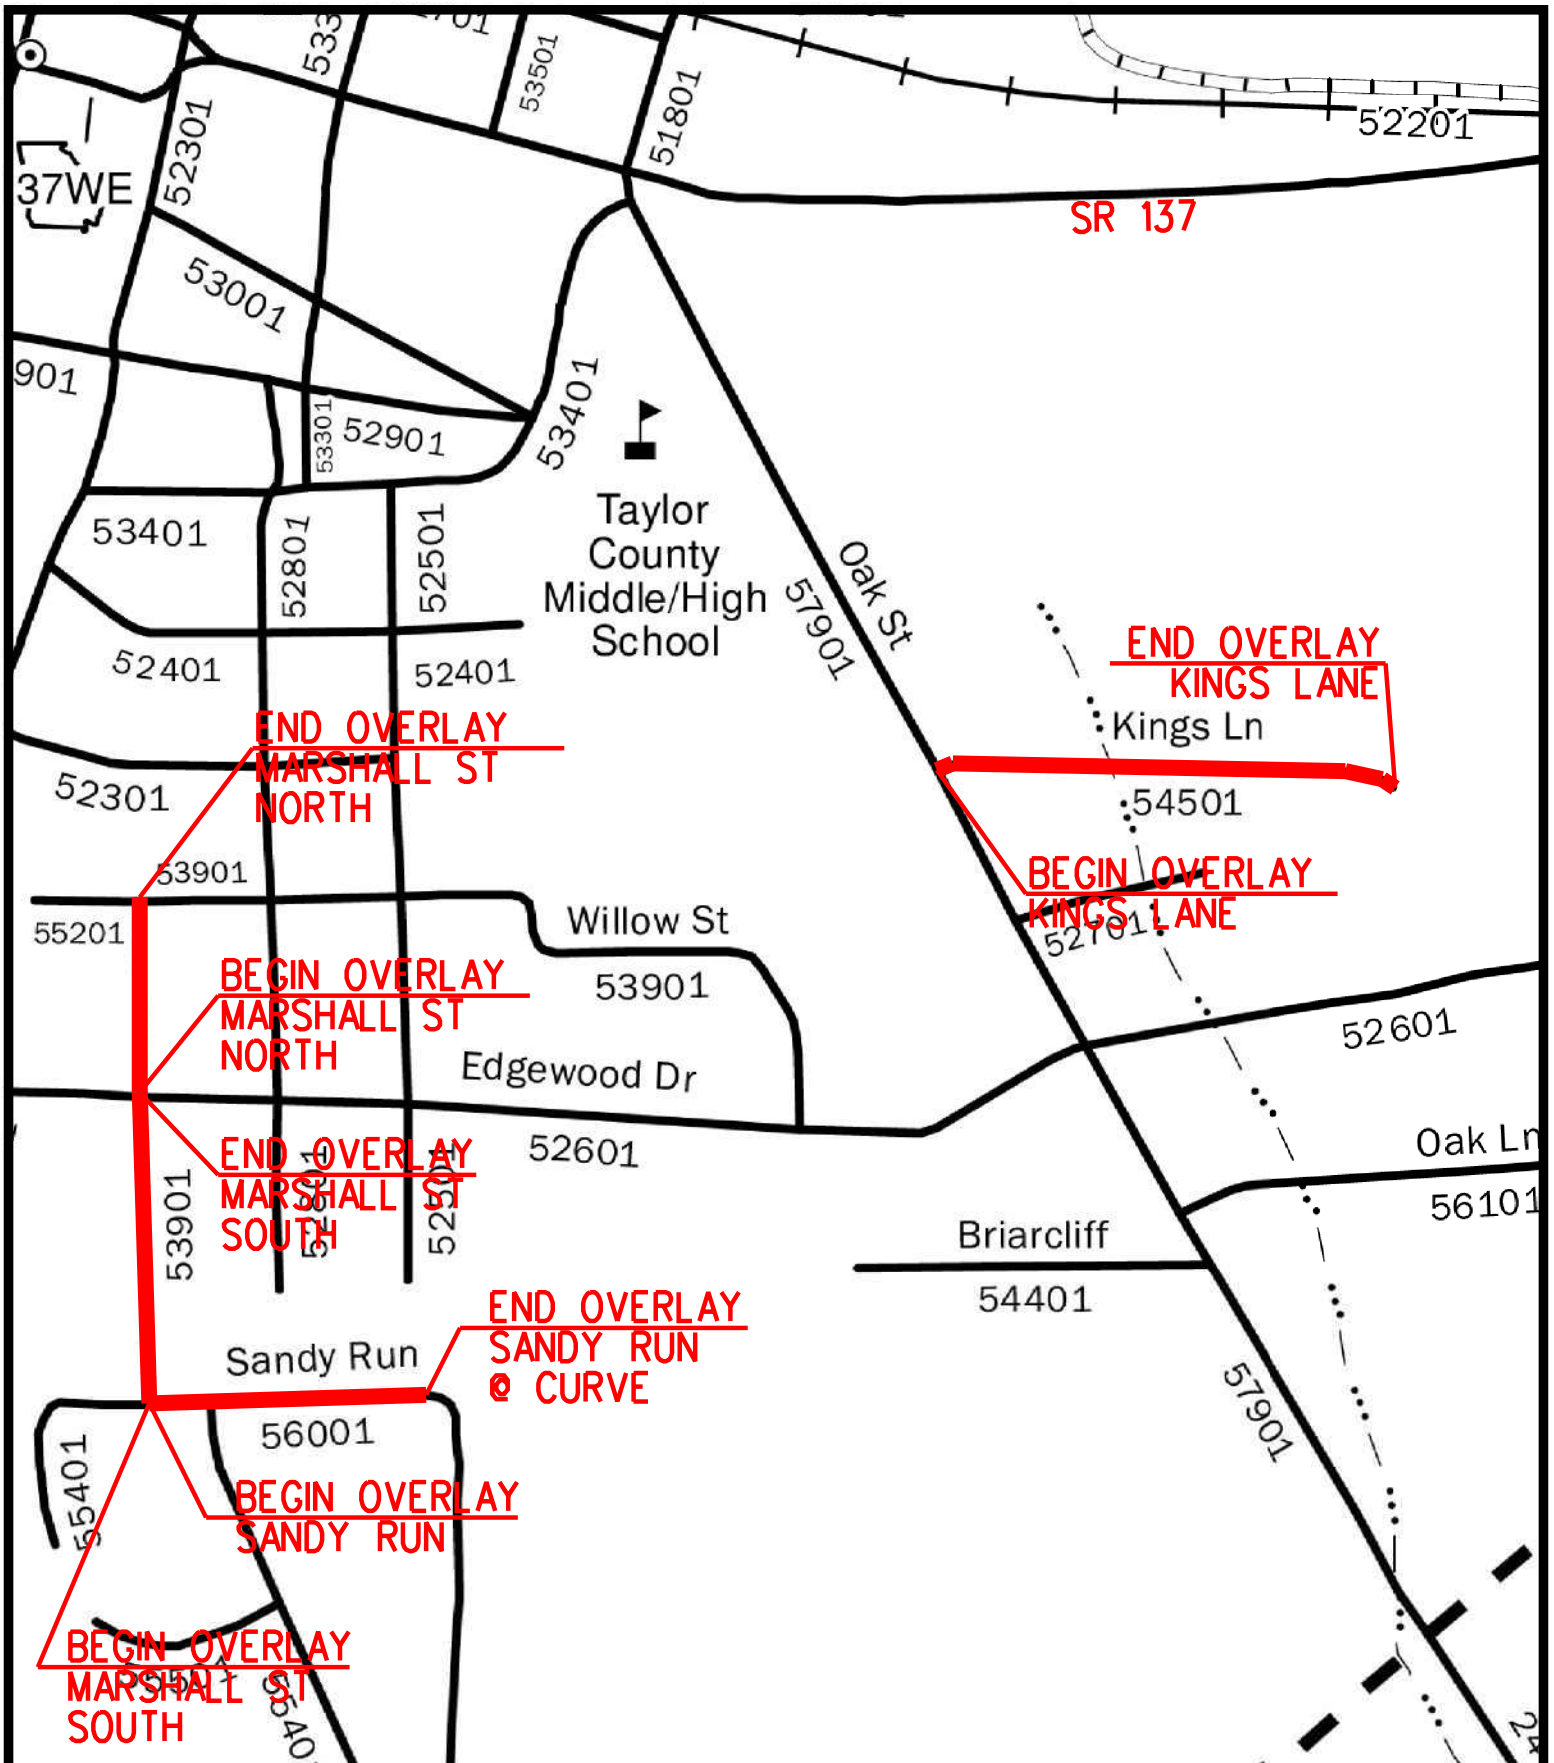

**Saunders
Engineering
Consultants, Inc.**

104-C Gunn Road, Centerville, GA 31028
(478) 953-1228 (478) 953-1248 Fax

Date: 10/20/25
Designed: RBS
Drawn: RBS
Checked: RBS
Project No: 1324

**CITY OF BUTLER
2025 LMIG**

LOCATION SKETCH

SHEET 2 OF 2

From: [Rick Saunders](#)
To: [Nick Murphy](#); ["Jonathan Mack"](#); ["Matt Andrews"](#); ["Kyle Hamilton"](#)
Subject: City of Butler LMIG & Taylor County LMIG
Date: Friday, November 14, 2025 9:10:03 AM

CAUTION: This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe.

All,

This email is being sent as a clarification of questions we received. See below:

1. Section 22. Description of Work in the Supplementary Conditions indicate that paving of driveway turnouts and shoulder grading is required for the project. However, there are no details for the driveway / side road paving and no details or pay items for the shoulder grading. Will these items be required for the project? If yes, please add pay items for the shoulder grading.
No Driveway Turnouts of Shoulder grading will be performed on the Butler LMIG project. ~~However, on the Taylor County LMIG, both Driveway Turnouts and Shoulder Grading are part of the contracted work.~~
2. Will testing such as density testing and/or roadway coring, if required, be the responsibility of the contractor or county? Typically, we have the testing covered at the plant for AC content and gradation only. We would like to verify if any other testing would be required on our behalf. **No additional testing will be required**

This is not an official addendum so no acknowledgement is required. However, please respond to this email so I know you received the clarification.

Rick Saunders, PE
Saunders Engineering Consultants, Inc.
104-C Gunn Road
Centerville, GA 31028
(478) 953-1228 O
(478) 953-1253 F



This email has been scanned for spam and viruses by Proofpoint Essentials. Click [here](#) to report this email as spam.