



Proposal

Date of Opening : December 19, 2025

Proposal ID : B1CBA2502795-0

Call Order : 011

Projects : M006412

Project No. : M006412

Counties : Lowndes

Proposal ID : B1CBA2502795-0

2.920 MILES OF MILLING AND PLANT MIX RESURFACING ON SR 7 ALT BEGINNING NORTH OF MAGNOLIA ST AND EXTENDING TO SR 7 BU (SMITHBRIAR DR).
(E)

DBE Goal: 0.00%

Proposal Guaranty: 5.00%

Time ID	Description	Completion Date or Number of Units	Time Type
00	COMPLETE CONTRACT	11/30/2026	DT
01	FAIL TO COMPLETE PAVING OPERATIONS - SEE SPEC PROV SEC 108	60	CD
02	FAIL TO REOPEN TRAVEL LANES - SEE SPEC PROV SEC 108		AD
03	FAIL TO REPLACE TRAFFIC LOOPS - SEE SPEC PROV SEC 108		AD

(*) - Indicates Cost Plus Time Site. See Schedule of Items for Cost Per Unit

NOTICE TO BIDDERS

If a DBE goal is specified, the bidder shall submit with this bid proposal a list of all proposed DBE participants. A form for this purpose is provided in this proposal. Please refer to the following specifications:

102.07 Rejection of Proposals

Disadvantaged Business Enterprise Program (Special Provision)

Bidders must enter all unit prices, make all extensions, and total the bid.

Line Number	Item Number	Quantity	Unit	Unit Price	Extension Price
Section 0001 ROADWAY					
0005	150-1000	1.000	LS	\$221,990.00000	\$221,990.00
	TRAFFIC CONTROL - M006412				
0010	402-1802	100.000	TN	\$160.00000	\$16,000.00
	RECYCLED ASPH CONC PATCHING, INCL BITUM MATL & H LIME				
0015	402-4510	7987.000	TN	\$101.00000	\$806,687.00
	RECYCLED ASPH CONC 12.5 MM SUPERPAVE, GP 2 ONLY, INCL POLYMER-MODIFIED BITUM MATL & H LIME				
0020	413-0750	6171.000	GL	\$1.00000	\$6,171.00
	TACK COAT				
0025	432-5010	95164.000	SY	\$1.00000	\$95,164.00
	MILL ASPH CONC PVMT, VARIABLE DEPTH				
0030	611-8050	34.000	EA	\$2,940.00000	\$99,960.00
	ADJUST MANHOLE TO GRADE				
0035	611-8140	58.000	EA	\$2,780.00000	\$161,240.00
	ADJUST WATER VALVE BOX TO GRADE				
0040	647-6300	61.000	EA	\$3,090.00000	\$188,490.00
	LOOP DETECTOR, 6 FT X 40 FT, QUADRUPOLE				
0045	653-0110	5.000	EA	\$61.75000	\$308.75
	THERMOPLASTIC PVMT MARKING, ARROW, TP 1				
0050	653-0120	95.000	EA	\$61.75000	\$5,866.25
	THERMOPLASTIC PVMT MARKING, ARROW, TP 2				
0055	653-0170	2.000	EA	\$155.00000	\$310.00
	THERMOPLASTIC PVMT MARKING, ARROW, TP 7				
0060	653-0210	3.000	EA	\$155.00000	\$465.00
	THERMOPLASTIC PVMT MARKING, WORD, TP 1				
0065	653-1704	13633.000	LF	\$5.65000	\$77,026.45
	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE				
0070	653-1804	6064.000	LF	\$1.80000	\$10,915.20
	THERMOPLASTIC SOLID TRAF STRIPE, 8 IN, WHITE				
0075	653-2603	1.570	LM	\$2,470.00000	\$3,877.90
	THERMOPLASTIC SOLID TRAF STRIPE, 6 IN, WHITE				
0080	653-2604	7.400	LM	\$2,470.00000	\$18,278.00
	THERMOPLASTIC SOLID TRAF STRIPE, 6 IN, YELLOW				
0085	653-2605	2.173	GLM	\$1,620.00000	\$3,520.26
	THERMOPLASTIC SKIP TRAF STRIPE, 6 IN, WHITE				
0090	653-2606	4.427	GLM	\$1,620.00000	\$7,171.74
	THERMOPLASTIC SKIP TRAF STRIPE, 6 IN, YELLOW				
0095	653-6004	362.000	SY	\$4.10000	\$1,484.20
	THERMOPLASTIC TRAF STRIPING, WHITE				
0100	653-6006	493.000	SY	\$4.10000	\$2,021.30
	THERMOPLASTIC TRAF STRIPING, YELLOW				
0105	654-1001	968.000	EA	\$4.10000	\$3,968.80
	RAISED PVMT MARKERS TP 1				
0110	654-1002	584.000	EA	\$4.10000	\$2,394.40
	RAISED PVMT MARKERS TP 2				
0115	654-1003	286.000	EA	\$4.10000	\$1,172.60

RAISED PVMT MARKERS TP 3

Section 0001 Total	\$1,734,482.85
--------------------	----------------

Item Total	\$1,734,482.85
------------	----------------

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA
PROPOSAL INDEX

Call Order Number: 011
Project No(s):M006412

Counties: Lowndes

Listed below are modifications and additions to the 2021 State of Georgia Standard Specifications and 2024 Supplemental Specifications Construction of Transportation Systems.

DBE Requirements
Bid Opportunity List
Georgia Security and Immigration Compliance Act Affidavit
Request for Eligibility to Bid
Federal Aid Requirements
Certification/Drug Free Workplace
Signature Page
Sexual Harassment Prevention Policy
Proposal Index
Notice to All Bidders
Federal Labor Provisions (FHWA 1273)
Required Contract Provisions Federal-Aid Contracts
Notice to Contractors
Wage Rates
Standard EEO Specifications
Notice of Affirmative Action
Disadvantaged Business Enterprise Program
Prompt Payment
Buy America
Utility Conflicts
Sec. 107 - Legal Regulations and Responsibilities to the Public (April 30, 2025)
Sec. 201 - Clearing and Grubbing Right-of-Way (July 21, 2025)
Sec. 208 - Embankments (August 26, 2024)
Sec. 300 - General Specifications for Base and Subbase Courses (January 22, 2025)
Sec. 301 - Soil-Cement Construction (January 22, 2025)
Sec. 315 - Cement Stabilized Reclaimed Base Construction (CSRB) (January 22, 2025)
Sec. 456 - Rumble Strips (July 1, 2025)
Sec. 548 - Micropile Foundations (September 9, 2025)

Sec. 632 - Portable Changeable Message Signs (July 21, 2025)
Sec. 653 - Thermoplastic Traffic Stripe (September 16, 2024)
Sec. 654 - Raised Pavement Markers (February 12, 2025)
Sec. 700 - Grassing (September 8, 2025)
Sec. 716 - Erosion Control Mats (Slopes) (March 6, 2024)
Sec. 800 - Coarse Aggregate (January 22, 2025)
Sec. 802 - Aggregates for Asphaltic Concrete (August 5, 2024)
Sec. 801 - Fine Aggregate (July 24, 2025)
Sec. 820 - Asphalt Cement (October 22, 2024)
Sec. 849 - Thin Lift Surface Sealing Asphaltic Concrete Mix (August 26, 2025)

Letter Size Plans
Construction Details (Resurfacing & Widening)
Sec. 107 - Legal Regulations and Responsibility to the Public
Sec. 108 - Prosecution and Progress (Subletting Contract) 70%
Sec. 108 - Prosecution and Progress (Waive Progress Schedule)
Sec. 108 - Temporary Suspension of Work
Sec. 108 - Prosecution and Progress (Failure or Delay in Completing Work on Time)
Sec. 150 - Traffic Control
Sec. 713 - Organic and Synthetic Material Fiber Blanket

****Project Specific Special Provisions below****

DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA

PLAN OF PROPOSED P. I. NO: M006412 LOWNDES COUNTY

STATE ROUTE 7 ALTERNATE

M006412 IS LOCATED 100 % WITHIN U. S. CONGRESSIONAL DISTRICT NO. 01

M006412 IS LOCATED 100 % WITHIN LOWNDES COUNTY

LOWNDES IS COUNTY NO. 185

MID-POINT COORDINATS (X,Y): (2572138.063, 311698.517) WEST ZONE

COMPLETED PLANS: OCTOBER 10, 2025

LENGTH OF PROJECT IN MILES


TOTAL

GROSS LENGTH OF PROJECT	2.920
LENGTH OF EXCEPTIONS	0.000
NET LENGTH OF PROJECT	2.920

PRESENT TRAFFIC: 21000 V.P.D. 4% TRUCKS

INDEX



1	COVER SHEET
2	INDEX
3	LOCATION SKETCH
4 – 6	TYPICAL SECTION
7 – 8	ROADWAY LOG
9	DETAILED ESTIMATE
10 – 12	GENERAL NOTES

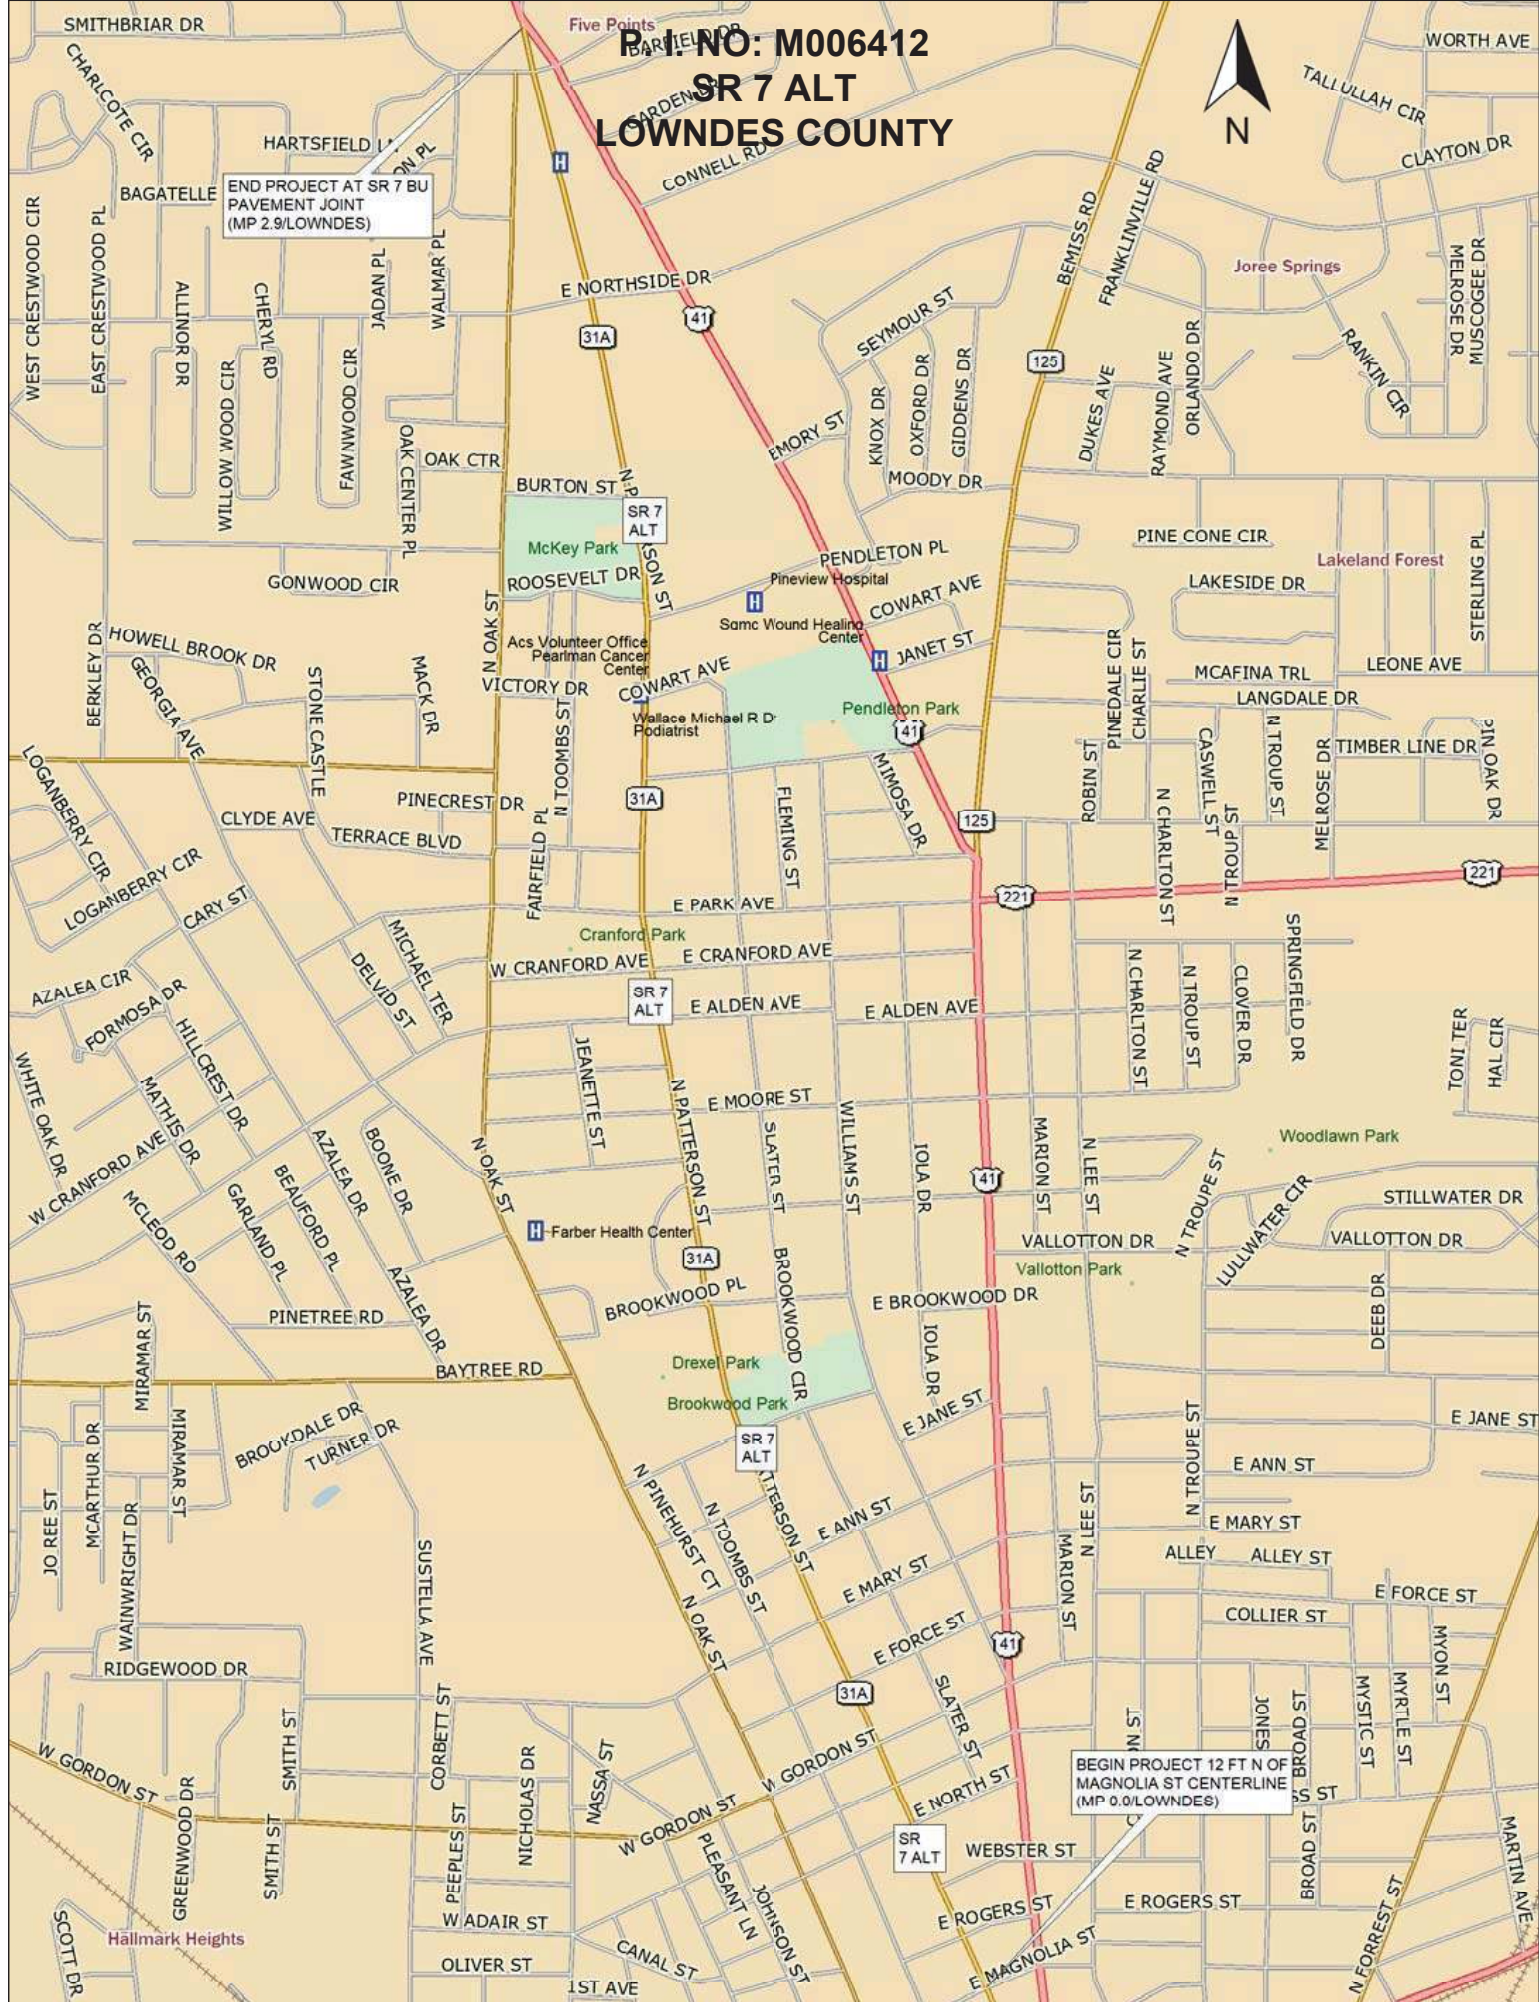


Data use subject to license.

© DeLorme. DeLorme Street Atlas USA® 2013.

www.delorme.com



TYPICAL SECTION OF

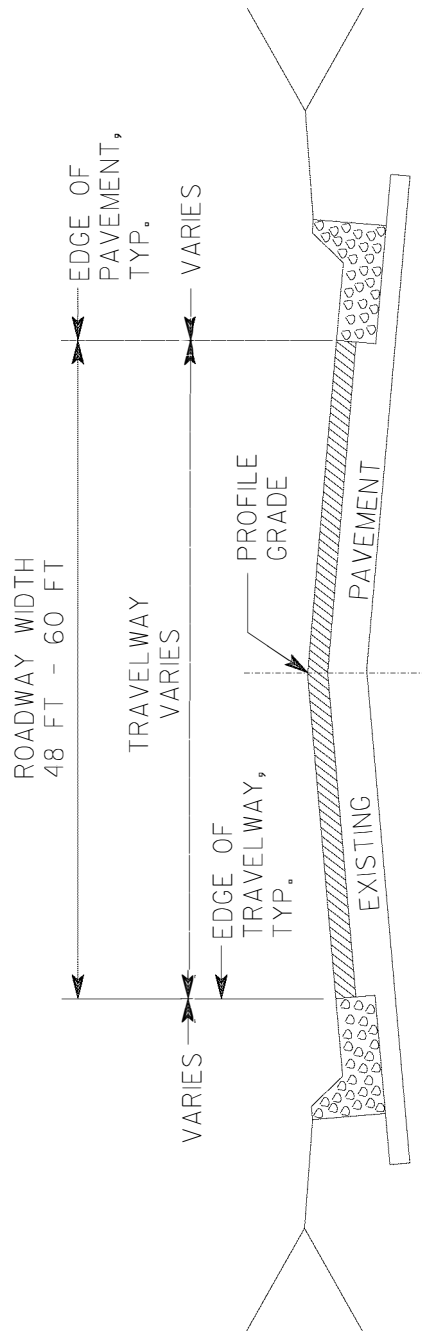

NORTHBOUND/SOUTHBOUND UNDIVIDED/Common SECTION


▨ - RESURFACED AREA

THIS TYPICAL SECTION APPLIES FROM LOG 0.000 TO LOG 2.860

MAINTAINING EXISTING CROSS-SLOPE, MILL ROADWAY WIDTH VARIABLE DEPTH (1 1/2 INCHES TYPICAL) AND AS DIRECTED BY THE ENGINEER, RESURFACE ROADWAY FULL WIDTH WITH 165 LBS PER SQUARE YARD RECYCLED ASPHALTIC CONCRETE 12.5 mm SUPERPAVE, GP 2 ONLY, INCL POLYMER-MODIFIED BITUM MATL & H LIME.
NOTE:

PROVIDE SMOOTH TRANSITION AND TIE-INS AT PROJECT START, END, SIDE STREETS DRIVEWAYS AND RAMP FROM SR 7.
MAINTAIN EXISTING ASPHALT ELEVATIONS AT OR IN GUTTERS, AT WHEELCHAIR CURB CUT RAMPS AND AT DRAINAGE STRUCTURES.

TYPICAL SECTION 02

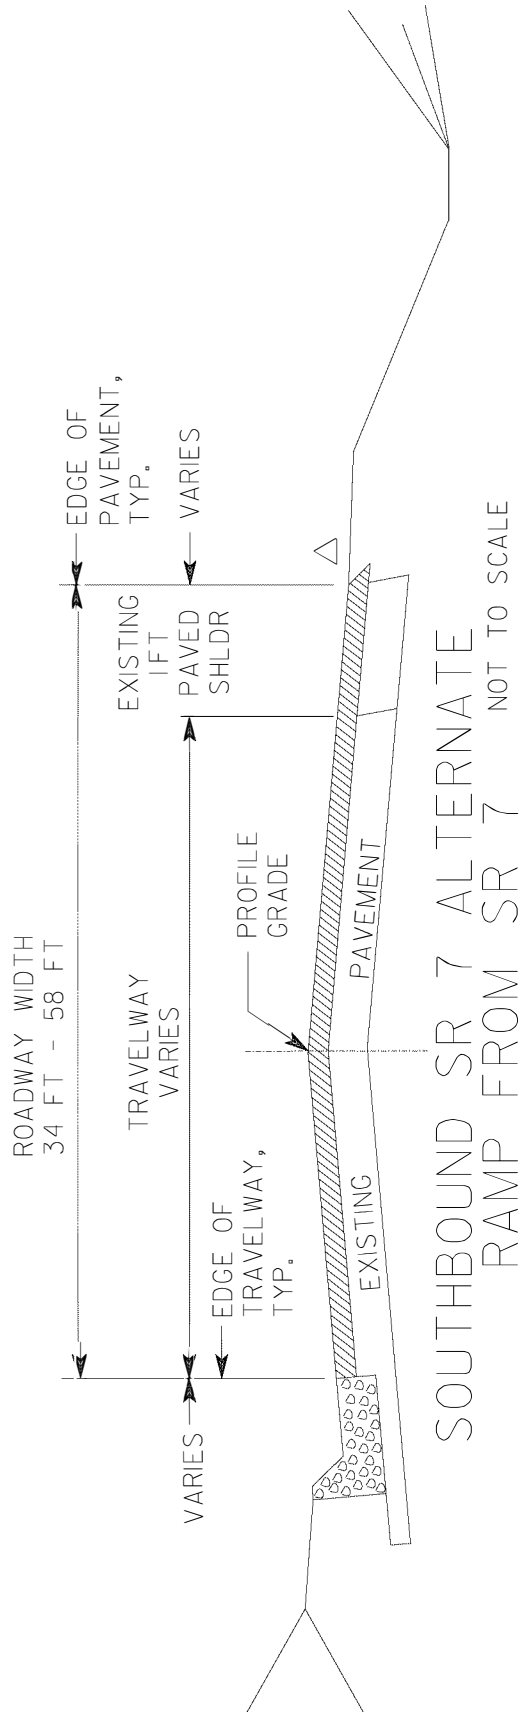

THIS TYPICAL SECTION APPLIES FROM LOG 0.000 TO LOG 0.060


MAINTAINING EXISTING CROSS-SLOPE, MILL ROADWAY WIDTH VARIABLE DEPTH (1 1/2 INCHES TYPICAL) AND AS DIRECTED BY THE ENGINEER. RESURFACE ROADWAY FULL WIDTH WITH 165 LBS PER SQUARE YARD RECYCLED ASPHALTIC CONCRETE 12.5 mm SUPERPAVE, GP 2 ONLY, INCL POLYMER-MODIFIED BITUM MATL & H LIME.

NOTE:

PROVIDE SMOOTH TRANSITION AND TIE-IN AT SR 7 AND AT SMITHBRIAR DR. DO NOT ALLOW FINISHED ASPHALT TO DROP BELOW LIP OF GUTTER. MAINTAIN EXISTING ASPHALT ELEVATION AT WHEELCHAIR CURB CUT RAMPS.

△ - SEE CONSTRUCTION DETAIL P-7

DETAIL FOR PAVING TURNOUTS FOR SIDE ROADS, STREETS, AND DRIVES

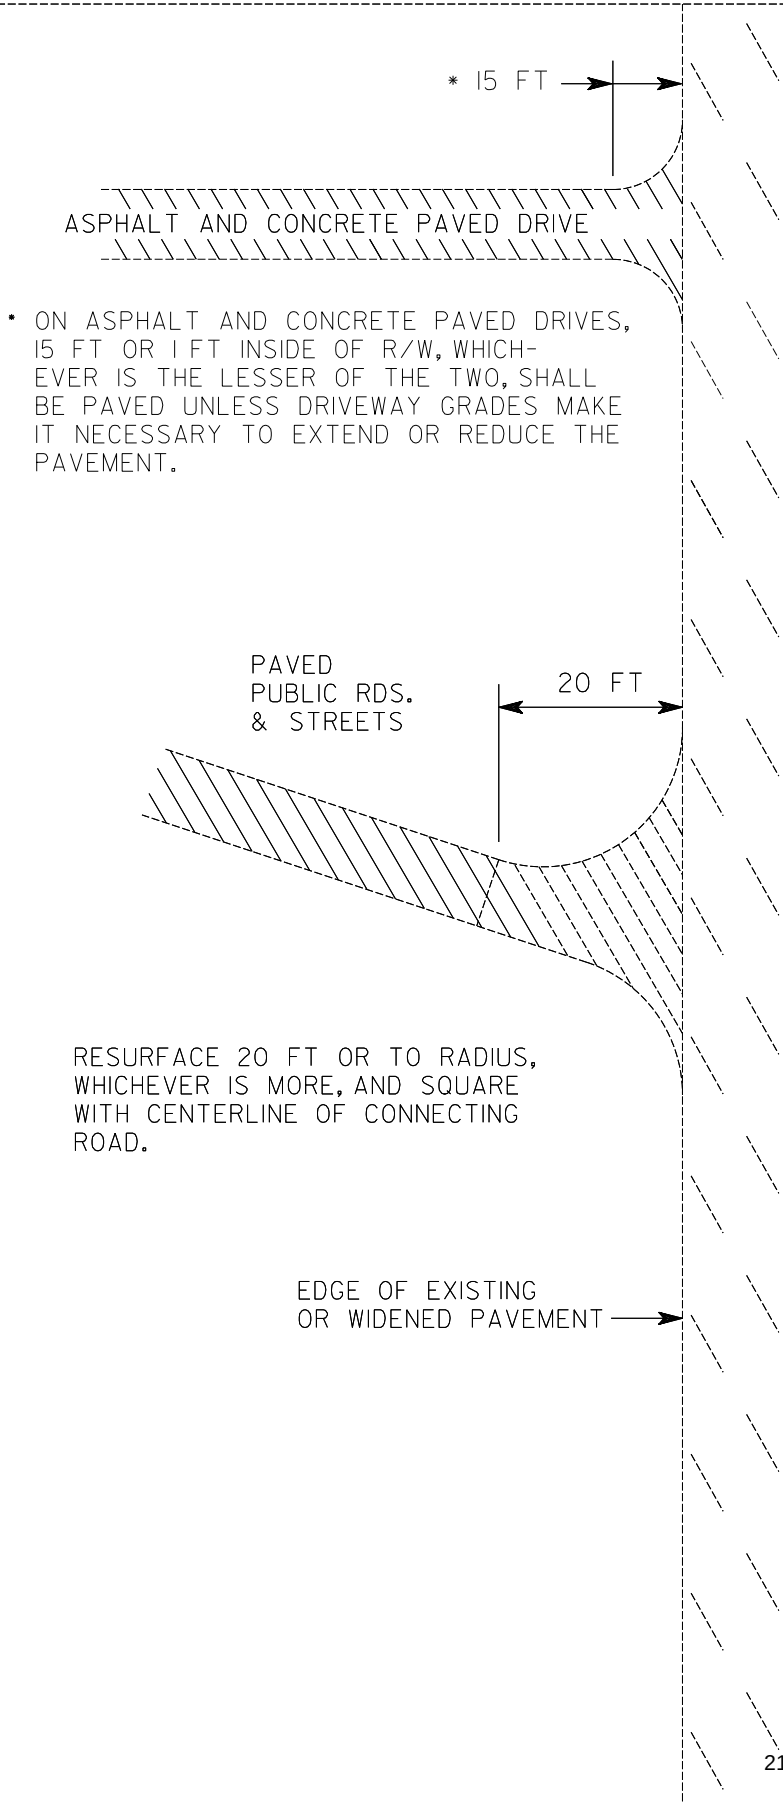

NOTES:

1. THE ENGINEER MAY MODIFY THESE DESIGNS AND THE DEPTH OF LEVELING AND SURFACING MAY VARY AS NECESSARY TO PROVIDE A SMOOTH, SAFE AND WELL DRAINED TRANSITION TO AND FROM PUBLIC ROADS AND DRIVEWAYS.
2. ALL PAVING TURNOUT REQUIREMENTS ARE TO BE MEASURED FROM FINAL EDGE OF PAVEMENT ON MAINLINE.
3. THE CONTRACTOR, AT THE DIRECTION OF THE ENGINEER, SHALL TIE-IN PAVED DRIVES, PUBLIC ROADS AND STREETS WITH 12.5 mm SUPERPAVE MIX NECESSARY TO EFFECT AN ACCEPTABLE TIE-IN. THE WORK SHALL BE PAID FOR UNDER 12.5 mm SUPERPAVE MIX DESIGNATED IN THE DETAILED ESTIMATE.
4. IN THE EVENT ASPHALT AND CONCRETE PAVED DRIVES REQUIRE EXTENSION BEYOND THE DESCRIBED LIMITS TO EFFECT AN ACCEPTABLE TIE-IN, REFERENCE SPECIAL PROVISION SECTION 231.
5. WHEN MILLING IS INCLUDED AS A PAY ITEM, ALL PAVED SIDE STREETS AND ROADS WITHIN THE MILLING LIMITS SHALL BE MILLED VARIABLE DEPTH TO THE BACK OF RADIUS, UNLESS OTHERWISE NOTED IN THE LOG SHEETS. MILLING WILL NOT BE REQUIRED FOR DRIVEWAYS. MILLING TO BE PAID FOR UNDER ITEM 432-.

(MILES)

LOG	NORTHBOUND/SOUTHBOUND UNDIVIDED COMMON SECTION	ROADWAY WIDTH (FT)
0.000	BEGIN PROJECT 12 FT +/- NORTH OF CENTERLINE OF EAST MAGNOLIA ST BEGIN FULL WIDTH VARIABLE DEPTH MILLING (1 ½ INCHES TYPICAL) AND AS DIRECTED BY ENGINEER BEGIN FULL WIDTH 165 LBS PER SQUARE YARD 12.5 MM RESURFACING MAINTAIN EXISTING ASPHALT ELEVATION IN GUTTERS AND AT DRAINAGE STRUCTURES MAINTAIN EXISTING WHEELCHAIR CURB CUT RAMP FUNCTION BEGIN CURB AND GUTTER LT & RT 48 FT ASPH CONC PVMT (MP 0.0/LOWNDES)	48
0.085	ROGERS ST, LT & RT, PAVED	
0.160	WEBSTER ST, RT, PAVED	
0.255	NORTH ST, LT & RT, PAVED	
0.320	ADAIR ST, LT & RT, PAVED	
0.386	GORDON ST, LT & RT, PAVED	
0.481	FORCE ST, LT & RT, PAVED	
0.581	MARY ST, LT & RT, PAVED	
0.676	ANN ST, LT & RT, PAVED	
0.779	JANE ST, LT, PAVED	
0.871	BROOKWOOD DR, LT & RT, PAVED	
1.196	EAST COLLEGE ST, RT, PAVED	
1.271	GEORGIA AVE. LT, PAVED	
1.342	MOORE ST, LT & RT, PAVED	
1.407	HIGH ST, LT, PAVED	
1.476	ALDEN AVE. LT & RT, PAVED	
1.543	CRANFORD AVE. LT & RT, PAVED	
1.627	PARK AVE. LT & RT, PAVED	
1.717	WAYNE AVE. LT, PAVED	
1.847	WOODROW WILSON DR, LT, PAVED GORNTD RD. RT, PAVED	
1.937	COWART AVE. RT, PAVED	
2.047	PENDLETON AVE. RT, PAVED	48

(MILES)

LOG	NORTHBOUND/SOUTHBOUND UNDIVIDED COMMON SECTION (CONTINUED)	ROADWAY WIDTH (FT)
2.082	ROSSEVELT DR, LT, PAVED	48
2.232	BURTON ST, LT, PAVED	
2.463	BEGIN RT TURN LANE TAPER RT END TWO WAY CENTER TURN LANE BEGIN LT TURN LANE	48
2.483	END RT TURN LANE TAPER RT BEGIN RT TURN LANE	60
2.518	NORTHSIDE DR, LT, PAVED GORNTD RD. RT, PAVED	
2.528	BEGIN LANE DROP TAPER RT	60
2.568	END LANE DROP TAPER RT	48
2.843	SMITHBRIAR DR, LT & RT, PAVED END NORTHBOUND/SOUTHBOUND UNDIVIDED COMMON SECTION BEGIN SOUTHBOUND SR 7 ALT RAMP FROM SR 7 NORTHBOUND SR 7 ALT TURNS RT CONTINUE MILL AND INLAY NB SR 7 ALT RT ONTO SMITHBRIAR DR TO RADIUS RETURN	48
2.860	END SR 7 ALT PROJECT AT SMITHBRIAR DR RADIUS RETURN (MP 2.9/LOWNDES)	48

(MILES)

LOG	SOUTHBOUND DIVIDED SR 7 ALTERNATE RAMP FROM SR 7	ROADWAY WIDTH (FT)
0.000	BEGIN SOUTHBOUND SR 7 ALTERNATE RAMP FROM SR 7 AT PAVEMENT JOINT AT SR 7/SR 7 ALT PHYSICAL GORE BEGIN FULL WIDTH VARIABLE DEPTH MILLING (1 ½ INCHES TYPICAL) AND AS DIRECTED BY ENGINEER BEGIN FULL WIDTH 165 LBS PER SQUARE YARD 12.5 MM RESURFACING MAINTAIN EXISTING ASPHALT ELEVATION IN GUTTERS AND AT DRAINAGE STRUCTURES MAINTAIN EXISTING WHEELCHAIR CURB CUT RAMP FUNCTION BEGIN CURB AND GUTTER LT BEGIN 12 FT PAVED SHOULDER TAPER LT BEGIN 1 FT PAVED SHOULDER RT BEGIN RT TURN LANE TAPER 38 FT ASPH CONC PVMT	38
0.010	END PAVED SHOULDER TAPER LT CONTINUE RT TURN LANE TAPER 34 FT ASPH CONC PVMT	34
0.017	END RT TURN LANE TAPER RT BEGIN RT TURN LANE	34
0.043	BEGIN RT TURN LANE TAPER RT	34
0.060	END SOUTHBOUND SR 7 ALT RAMP AT SMITHBRIAR DR/SR 7 COMMON SECTION	58

DETAILED ESTIMATE

ITEM NO.	DESCRIPTION	UNIT	QUANTITY
150-1000	TRAFFIC CONTROL – M006412	LS	LS
402-1802	RECYCLED ASPH CONC PATCHING, INCL BITUM MATL & H LIME	TN	100
402-4510	RECYCLED ASPH CONC 12.5 mm SUPERPAVE, GP 2 ONLY, INCL POLYMER-MODIFIED BITUM MATL & H LIME	TN	7987
413-0750	TACK COAT	GL	6171
432-5010	MILL ASPH CONC PVTM, VARIABLE DEPTH	SY	95164
611-8050	ADJUST MANHOLE TO GRADE	EA	34
611-8140	ADJUST WATER VALVE BOX TO GRADE	EA	58
647-6300	LOOP DETECTOR – 6 FT X 40 FT QUADRUPOLE	EA	61
653-0110	THERMOPLASTIC PVTM MARKING, ARROW, TP 1	EA	5
653-0120	THERMOPLASTIC PVTM MARKING, ARROW, TP 2	EA	95
653-0170	THERMOPLASTIC PVTM MARKING, ARROW, TP 7	EA	2
653-0210	THERMOPLASTIC PVTM MARKING, WORD, TP 1	EA	3
653-1704	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	LF	13633
653-1804	THERMOPLASTIC SOLID TRAF STRIPE, 8 IN WHITE	LF	6064
653-2603	THERMOPLASTIC SOLID TRAF STRIPE, 6 IN, WHITE	LM	1.570
653-2604	THERMOPLASTIC SOLID TRAF STRIPE, 6 IN, YELLOW	LM	7.400
653-2605	THERMOPLASTIC SKIP TRAF STRIPE, 6 IN, WHITE	GLM	2.173
653-2606	THERMOPLASTIC SKIP TRAF STRIPE, 6 IN, YELLOW	GLM	4.427
653-6004	THERMOPLASTIC TRAF STRIPE, WHITE	SY	362
653-6006	THERMOPLASTIC TRAF STRIPE, YELLOW	SY	493
654-1001	RAISED PVTM MARKERS TP 1	EA	968
654-1002	RASIED PVTM MARKERS TP 2	EA	584
654-1003	RAISED PVTM MARKERS TP 3	EA	286

GENERAL NOTES

1. ALL REFERENCES IN THIS DOCUMENT, WHICH INCLUDES ALL PAPERS, WRITINGS, DOCUMENTS, DRAWINGS, OR PHOTOGRAPHS USED, OR TO BE USED, IN CONNECTION WITH THIS DOCUMENT, TO THE STATE HIGHWAY DEPARTMENT OF GEORGIA, STATE HIGHWAY DEPARTMENT, GEORGIA STATE HIGHWAY DEPARTMENT, HIGHWAY DEPARTMENT, OR DEPARTMENT WHEN THE CONTEXT THEREOF MEANS THE STATE HIGHWAY DEPARTMENT OF GEORGIA, SHALL BE DEEMED TO MEAN, THE GEORGIA DEPARTMENT OF TRANSPORTATION.
2. THE DATA, TOGETHER WITH ALL OTHER INFORMATION SHOWN ON THESE PLANS, OR IN ANY WAY INDICATED THEREBY, WHETHER BY DRAWINGS OR NOTES, OR IN ANY OTHER MANNER, ARE BASED UPON FIELD INVESTIGATIONS AND ARE BELIEVED TO BE INDICATIVE OF ACTUAL CONDITIONS. HOWEVER, THE SAME ARE SHOWN AS INFORMATION ONLY, ARE NOT GUARANTEED AND DO NOT BIND THE DEPARTMENT OF TRANSPORTATION IN ANY WAY. THE ATTENTION OF THE BIDDER IS SPECIFICALLY DIRECTED TO SECTIONS 102.04, 102.05, AND 104.03 OF THE SPECIFICATIONS.
3. THESE PLANS HAVE BEEN PREPARED IN ACCORDANCE WITH THE 2025 CONSTRUCTION STANDARDS AND DETAILS BOOK AND ATTACHED APPLICABLE REVISIONS. THE 2025 CONSTRUCTION STANDARDS AND DETAILS BOOK IS AVAILABLE AT:
<http://mydocs.dot.ga.gov/info/gdotpubs/ConstructionStandardsAndDetails/Forms/AllItems.aspx>
ANY REVISIONS CONTAINED WITHIN THIS PLAN SET SUPERSEDE THE 2025 CONSTRUCTION STANDARDS AND DETAILS BOOK WHICH THEY REVISE OR IN WHICH THERE IS A CONFLICT.
4. IN PREPARATION OF THE ROADWAY PRIOR TO RESURFACING, BLADE THE EXISTING SHOULDERS NO LOWER IN ELEVATION THAN THE EXISTING PAVEMENT OR SHOULDER. SHOULDER MATERIAL DISPLACED BY THE CLEANING OPERATION PRIOR TO RESURFACING SHALL BE REMOVED AND DISPOSED OF AT AN APPROVED DISPOSAL SITE OFF D.O.T. RIGHT-OF-WAY. THE COST OF THIS WORK SHALL BE INCLUDED IN THE OVERALL BID PRICE.
5. FULL WIDTH DESIGNATIONS NOTED IN TYPICAL SECTIONS, ROADWAY LOGS AND NOTES ARE TO BE FROM EDGE OF PAVEMENT TO EDGE OF PAVEMENT WHICH INCLUDES MAINLINE LANES, TURN LANES, INSIDE SHOULDER, OUTSIDE SHOULDER, GORE AREAS, MEDIAN CROSSOVERS, AND RAMP LANES. ALL WORK TO BE COMPLETED AS DESIGNATED IN THE PLANS AS FULL WIDTH SHALL COVER ALL THESE AREAS.
6. QUANTITIES FOR TURNOUTS, FLARES, ETC., ARE INCLUDED ON THE DETAILED ESTIMATE.
7. FLARES TO BE RESURFACED WILL REQUIRE NO ADDITIONAL BASE MATERIAL.
8. THE PAVING OPERATION, EXCLUDING PATCHING, WILL BE COMPLETED WITHIN SIXTY (60) CALENDAR DAYS UPON START OF THE PAVING OPERATION. FAILURE TO COMPLETE PAVING OPERATION WITHIN THE SPECIFIED TIME WILL RESULT IN LIQUIDATED DAMAGES TO BE ASSESSED IN ACCORDANCE WITH SUBSECTION 108.08 OF THE SPECIFICATIONS.
9. ALL PATCHING SHALL BE FULL LANE WIDTH AT A SIX (6) INCH DEPTH AND AS DIRECTED BY THE ENGINEER BEFORE PERFORMING MILLING AND RESURFACING OPERATIONS.
10. PROVIDE POSITIVE DRAINAGE IN THE MILLING OPERATION TO ENSURE WATER DOES NOT POND ON THE ROADWAY.
11. MILLED AREAS WILL BE COVERED WITH FINAL SURFACE COURSE WITHIN THREE (3) CALENDAR DAYS OF BEING MILLED. FAILURE TO COVER MILLED AREAS AS SPECIFIED WILL RESULT IN LIQUIDATED DAMAGES TO BE ASSESSED IN ACCORDANCE WITH SPECIAL PROVISION SUBSECTION 150.7.01 OF THE SPECIFICATIONS.

GENERAL NOTES (CONTINUED)

12. ALL DRAINAGE STRUCTURES WITHIN THE LIMITS OF THE PROJECT WILL BE MAINTAINED THROUGHOUT THE DURATION OF THE PROJECT. ANY DEBRIS THAT GOES IN DRAINAGE STRUCTURES AS A RESULT OF THE MILLING OPERATION WILL BE CLEANED OUT AT NO ADDITIONAL COST TO THE DEPARTMENT.
13. RESTRIPE ALL EXISTING ROADWAY MARKINGS AT EXISTING LOCATIONS ON ROADWAY AND AS CURRENTLY MARKED. EXISTING CROSSWALKS SHALL BE STRIPED IN ACCORDANCE WITH CROSSWALK DETAIL ON CONSTRUCTION DETAIL T-11A. RESTRIPE ALL EXISTING ROADWAY MARKINGS ON SIDE ROADS TO THE END OF THE NEW RESURFACED SECTION. RESTRIPE OR PAINT (WHERE NOT EXISTING) STOP BARS AT ALL PAVED SIDE ROADS AND STREETS. REFERENCE PAVEMENT MARKING DETAILS AND NOTES IN THE PLANS FOR LOCATING EDGE LINES.
14. TEMPORARY STRIPING IS REQUIRED IN ACCORDANCE WITH SECTION 150.2.08 AND 150.3.10 OF THE GEORGIA SPECIFICATIONS. PLACEMENT OF PERMANENT PAVEMENT MARKINGS SHALL NOT BEGIN UNTIL FINAL SURFACE COURSE HAS BEEN COMPLETED FOR FIFTEEN (15) CALENDAR DAYS.
15. RESTRIPE OR STRIPE (WHERE NOT EXISTING) CROSSWALKS AT ALL LOCATIONS OF CURB CUT (WHEELCHAIR) RAMPS IN ACCORDANCE WITH STRIPING DETAILS AS SHOWN IN THE PLANS.
16. CONSTRUCT SIXTY-ONE (61) - 6 FT X 40 FT QUADRUPOLE LOOPS.
17. ALL LOOP REPLACEMENT WORK SHALL CONFORM TO THE APPROPRIATE SECTIONS OF THE DEPARTMENT'S SPECIFICATIONS, SECTION 647- AND SECTION 925-, AND LOOP INSTALLATION DETAILS IN THE PLANS. THE LOCATION OF REPLACEMENT LOOP DETECTORS, WHERE PRACTICAL, SHALL COINCIDE WITH ORIGINAL LOCATION.
18. TESTING OF THE REPLACEMENT LOOP DETECTORS SHALL BE PERFORMED AT THE POINT WHERE THE LOOP WIRE IS SPICED TO THE EXISTING SHIELDED LEAD-IN WIRE, NORMALLY INSIDE THE PULLBOX OR CONDULET CLOSEST TO THE CURB. IF THERE IS NO PULLBOX OR CONDULET, SPICING SHALL BE IN THE BASE OF THE CABINET OR POLE. THERE SHALL BE NO WORK OR TESTING REQUIRED BEYOND THIS SPLICE POINT.
19. THERE IS NO KNOWN SUITABLE PLACE TO BURY THE EXISTING CONSTRUCTION DEBRIS WITHIN THE PROJECT'S LIMITS. THE CONTRACTOR SHALL PROVIDE AN ENVIRONMENTALLY APPROVED SITE AS SHOWN IN GA. SPECIFICATION 201 TO DISPOSE OF THE EXISTING CONSTRUCTION DEBRIS AT NO ADDITIONAL COST TO THE DEPARTMENT.
20. WHEN ESAs ARE SHOWN ON THE PLANS, ENSURE THAT ALL CONSTRUCTION RELATED ACTIVITIES IN PLACES ADJACENT TO ENVIRONMENTALLY SENSITIVE AREAS (ESAs) (EASEMENTS, STAGING, VEHICULAR USE, BORROW OR WASTE ACTIVITIES, CONSTRUCTION TRAILER PLACEMENT AND STAGING) BE RESTRICTED TO THE EXISTING RIGHT-OF-WAY.
21. THERE ARE NO ADDITIONAL ENVIRONMENTAL RESOURCE IMPACTS INCLUDED IN THIS PROJECT.
22. UP TO FIVE HUNDREED (500) TONS OF THE MILLED ASPHALTIC MATERIAL FROM THIS PROJECT SHALL BE SALVAGED AS DIRECTED BY THE ENGINEER AND REMAIN THE PROPERTY OF THE DEPARTMENT. THE CONTRACTOR SHALL DELIVER AND STOCKPILE THE MILLED ASPHALTIC MATERIAL AT THE LOWNDES COUNTY ROUTINE MAINTENANCE HEADQUARTERS AT 3351 CEDAR RD. VALDOSTA, GEORGIA AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHALL COORDINATE DELIVERY WITH THE AREA RESIDENT ENGINEER'S OFFICE AT (229) 333-5287.
23. THIS PROJECT DOES NOT REQUIRE A NOI.

GENERAL NOTES (CONTINUED)

24. NOTIFY UTILITY COMPANIES A MINIMUM SIXTY (60) DAYS IN ADVANCE OF ANY PROPOSED WORK IN ORDER FOR UTILITY COMPANIES TO BEGIN CLEARING CONFLICTS WITH SCHEDULED WORK. MILLING AROUND MANHOLES AND VALVES WILL BE ALLOWED IN ORDER TO MEET THE CONTRACT COMPLETION DATES, THESE AREAS SHALL BE COVERED WITH THE FINAL SURFACE COURSE THE SAME DAY AT NO ADDITIONAL COST TO THE DEPARTMENT.
25. THE REQUIRED ADJUSTMENTS OF SANITARY SEWER, COMBINATION SEWER, AND STORM DRAIN MANHOLES FOR THIS PROJECT WILL BE PAID UNDER PAY ITEM 611-8050, ADJUST MANHOLE TO GRADE. THE LOWERING TO GRADE AND RAISING TO GRADE OPERATIONS WILL BE TREATED AS ONE PAY ITEM PER MANHOLE FOR THE ADJUSTMENTS COMPLETE. THE CONTRACTOR SHALL COMPLY WITH TO THE CURRENT UTILITY ACCOMMODATION POLICY AND STANDARDS, AVAILABLE AT:
https://www.dot.ga.gov/PartnerSmart/utilities/Documents/2016_UAM.pdf
26. THE REQUIRED ADJUSTMENTS OF WATER VALVES FOR THIS PROJECT WILL BE PAID UNDER PAY ITEM 611-8140, ADJUST WATER VALVE TO GRADE. THE LOWERING TO GRADE AND RAISING TO GRADE OPERATIONS WILL BE TREATED AS ONE PAY ITEM PER WATER VALVE FOR THE ADJUSTMENTS COMPLETE. THE CONTRACTOR SHALL COMPLY WITH TO THE CURRENT UTILITY ACCOMMODATION POLICY AND STANDARDS, AVAILABLE AT:
https://www.dot.ga.gov/PartnerSmart/utilities/Documents/2016_UAM.pdf

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA
SPECIAL PROVISION**

**P.I. No.: M006412
LOWNDES COUNTY**

SECTION 108 - PROSECUTION AND PROGRESS

Retain Sub-Section 108.08 as written and add the following:

108.08. Failure or Delay in Completing Work on Time

C. Intermediate Completion

An overall Completion Date is established for this Project.

For this project the following item of work and corresponding intermediate time is required:

1. Complete Paving Operations

Failure to complete all paving operations, excluding patching, (e.g., shoulder clipping, asphalt shoulder widening, milling, leveling, resurfacing, etc.) within sixty (60) calendar days, from the start date of any of the paving operations, will result in the assessment of Liquidated Damages at a rate of \$500.00 per calendar day.

D. Restrictive Work Hours

1. Failure to re-open travel lanes as specified in Special Provision Section 150.6.A will result in the assessment of liquidated damages in the amount of \$2000.00 per hour or portion thereof.

E. Traffic Loops

1. Failure to replace Traffic Loops operational within the designated time as specified in Section 150.6 will result in the assessment of Liquidated Damages in the amount of \$2000.00 dollars per day or any part thereof.

The above rates are cumulative and are in addition to any Liquidated Damages which may be assessed for failure to complete the overall project.

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA
SPECIAL PROVISION**

**P.I. No.: M006412
LOWNDES COUNTY**

SECTION 150 – TRAFFIC CONTROL

Delete Subsection 150.6 and add the following:

150.6 Special Conditions:

A. Single Lane Closures

Single lane closures are allowed daily between the hours of 7:00 pm to 6:00 am Monday through Sunday.

B. Miscellaneous:

1. Traffic Loops

Traffic Loops removed or damaged during the resurfacing shall be replaced and operational within 4 days of applying final surface course. Failure to have replacement traffic loops operational within the time specified will result in the assessment of penalties as specified in Special Provision 108.08.

December 4, 2025

AMENDMENT TO ADVERTISED CONTRACT

CONTRACT I.D. NUMBER: B1CBA2502795-0

GEORGIA PROJECT NUMBER: M006412

PCN: M006412

COUNTY: LOWNDES

AMENDMENT NUMBER: 1

LETTING DATE: December 19, 2025

LETTING NUMBER: 011

THE FOLLOWING CHANGES ARE HEREBY MADE TO THIS CONTRACT. THE BIDDER IS RESPONSIBLE FOR MAKING ANY NECESSARY CHANGES IN INK IN THE PROPOSAL. BIDDER SHALL ACKNOWLEDGE THIS AMENDMENT BY CHECKING THE APPROPRIATE SPACE ON THE PROPOSAL SIGNATURE PAGE.

1.**Delete** Proposal Pages 211 and 212 from the proposal, **and Substitute** the attached revised/added pages 211 and 212 in the proposal.

WILLIAM DUNWOODY
STATE TRANSPORTATION OFFICE ADMINISTRATOR