



Proposal

Date of Opening : December 19, 2025

Proposal ID : B1CBA2502850-0

Call Order : 008

Projects : M006670

Project No. : M006670

Counties : Echols

Proposal ID : B1CBA2502850-0

5.505 MILES OF MILLING, PLANT MIX RESURFACING AND SHOULDER REHABILITATION ON SR 11 BEGINNING AT THE FLORIDA STATE LINE AND EXTENDING SOUTH OF BAY BRANCH RD.
(E)

DBE Goal: 0.00%

Proposal Guaranty: 5.00%

Time ID	Description	Completion Date or Number of Units	Time Type
00	COMPLETE CONTRACT	11/30/2026	DT
01	FAIL TO COMPLETE PAVING OPERATIONS - SEE SPEC PROV SEC 108	90	CD
02	FAIL TO COMPLETE SHLDR REHAB - SEE SPEC PROV SEC 108	30	CD
03	FAIL TO COVER SURFACE TREATED AREAS - SEE SPEC PROV SEC 108		AD

(*) - Indicates Cost Plus Time Site. See Schedule of Items for Cost Per Unit

The following sections are alternates:

0001	AA	1	ALT 1 - RECYCLED ASPH CONC LEVELING
0002	AA	2	ALT 2 - ASPHALTIC CONCRETE OPEN GRADED CRACK RELIEF INTERLAYER

NOTICE TO BIDDERS

If a DBE goal is specified, the bidder shall submit with this bid proposal a list of all proposed DBE participants. A form for this purpose is provided in this proposal. Please refer to the following specifications:

102.07 Rejection of Proposals

Disadvantaged Business Enterprise Program (Special Provision)

Bidders must enter all unit prices, make all extensions, and total the bid.



1/7/2026

Contract Schedule

Page 1 of 3

Contract ID: B1CBA2502850-0**Project(s):** M006670**Awarded Vendor:** 2RE120

REAMES AND SON CONSTRUCTION COMPANY, INC.

SECTION 0002**ALT 2 - ASPHALTIC CONCRETE OPEN GRADED CRACK
RELIEF INTERLAYER****\$515,443.00**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0015	413-0750 TACK COAT	6,658.000 GL	1.00000		6,658.00	
0020	415-5000 ASPHALTIC CONCRETE OPEN GRADED CRACK RELIEF INTERLAYER, GP 2 ONLY, INCL BITUM MATL & H LIME	4,755.000 TN	107.00000		508,785.00	



1/7/2026

Contract Schedule

Page 2 of 3

Contract ID: B1CBA2502850-0

Project(s): M006670

Awarded Vendor: 2RE120

REAMES AND SON CONSTRUCTION COMPANY, INC.

SECTION 0003

ROADWAY

\$1,052,240.83

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0025	150-1000 TRAFFIC CONTROL - M006670	LUMP SUM			88,990.00	
0030	163-0232 TEMPORARY GRASSING	2.692 AC	423.00000		1,138.72	
0035	210-0200 GRADING PER MILE	5.505 LM	10,400.00000		57,252.00	
0040	231-1250 MISCELLANEOUS CONSTRUCTION, UNPAVED ROADS, STREETS AND DRIVEWAYS	51.000 EA	237.00000		12,087.00	
0045	402-1802 RECYCLED ASPH CONC PATCHING, INCL BITUM MATL & H LIME	100.000 TN	165.00000		16,500.00	
0050	402-3103 RECYCLED ASPH CONC 9.5 MM SUPERPAVE, TYPE II, GP 2 ONLY, INCL BITUM MATL & H LIME	7,771.000 TN	99.25000		771,271.75	
0055	413-0750 TACK COAT	7,476.000 GL	1.00000		7,476.00	
0060	432-5010 MILL ASPH CONC PVMT, VARIABLE DEPTH	1,888.000 SY	3.85000		7,268.80	
0065	456-2070 SINUSOIDAL SHOULDER RUMBLE STRIPS - GROUND IN PLACE CONTINUOUS, 6 IN (150 MM)	11.010 GLM	1,770.00000		19,487.70	
0070	456-2078 SINUSOIDAL CENTERLINE RUMBLE STRIPS-GROUND IN PLACE (CONTINUOUS), DOUBLE ROW 6IN (150 MM)	5.505 GLM	1,770.00000		9,743.85	
0075	653-1704 THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	72.000 LF	15.50000		1,116.00	



1/7/2026

Contract Schedule

Page 3 of 3

Contract ID: B1CBA2502850-0**Project(s):** M006670**Awarded Vendor:** 2RE120

REAMES AND SON CONSTRUCTION COMPANY, INC.

SECTION 0003**ROADWAY****\$1,052,240.83**

Proposal Line Number	Item ID Description	Approximate Quantity and Units	Unit Price		Bid Amount	
			Dollars	Cents	Dollars	Cents
0080	653-2603 THERMOPLASTIC SOLID TRAF STRIPE, 6 IN, WHITE	11.104 LM	2,060.00000		22,874.24	
0085	653-2606 THERMOPLASTIC SKIP TRAF STRIPE, 6 IN, YELLOW	5.505 GLM	1,440.00000		7,927.20	
0090	654-1001 RAISED PVMT MARKERS TP 1	750.000 EA	5.15000		3,862.50	
0095	700-6910 PERMANENT GRASSING	5.339 AC	835.00000		4,458.07	
0100	700-7000 AGRICULTURAL LIME	10.678 TN	336.00000		3,587.81	
0105	700-8000 FERTILIZER MIXED GRADE	1.068 TN	1,960.00000		2,093.28	
0110	700-8100 FERTILIZER NITROGEN CONTENT	267.000 LB	13.00000		3,471.00	
0115	713-3011 WOOD FIBER BLANKET, TP I, SHOULDERS	500.000 SY	1.05000		525.00	
0120	713-3012 WOOD FIBER BLANKET, TP II, SHOULDERS	25,837.000 SY	0.43000		11,109.91	

Total Bid: \$1,567,683.83

DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA
PROPOSAL INDEX

Call Order Number: 008
Project No(s):M006670

Counties: Echols

Listed below are modifications and additions to the 2021 State of Georgia Standard Specifications and 2024 Supplemental Specifications Construction of Transportation Systems.

DBE Requirements
Bid Opportunity List
Georgia Security and Immigration Compliance Act Affidavit
Request for Eligibility to Bid
Federal Aid Requirements
Certification/Drug Free Workplace
Signature Page
Sexual Harassment Prevention Policy
Proposal Index
Notice to All Bidders
Federal Labor Provisions (FHWA 1273)
Required Contract Provisions Federal-Aid Contracts
Notice to Contractors
Wage Rates
Standard EEO Specifications
Notice of Affirmative Action
Disadvantaged Business Enterprise Program
Prompt Payment
Buy America
Utility Conflicts
Sec. 107 - Legal Regulations and Responsibilities to the Public (April 30, 2025)
Sec. 201 - Clearing and Grubbing Right-of-Way (July 21, 2025)
Sec. 208 - Embankments (August 26, 2024)
Sec. 300 - General Specifications for Base and Subbase Courses (January 22, 2025)
Sec. 301 - Soil-Cement Construction (January 22, 2025)
Sec. 315 - Cement Stabilized Reclaimed Base Construction (CSRB) (January 22, 2025)
Sec. 456 - Rumble Strips (July 1, 2025)
Sec. 548 - Micropile Foundations (September 9, 2025)

Sec. 632 - Portable Changeable Message Signs (July 21, 2025)
Sec. 653 - Thermoplastic Traffic Stripe (September 16, 2024)
Sec. 654 - Raised Pavement Markers (February 12, 2025)
Sec. 700 - Grassing (September 8, 2025)
Sec. 716 - Erosion Control Mats (Slopes) (March 6, 2024)
Sec. 800 - Coarse Aggregate (January 22, 2025)
Sec. 802 - Aggregates for Asphaltic Concrete (August 5, 2024)
Sec. 801 - Fine Aggregate (July 24, 2025)
Sec. 820 - Asphalt Cement (October 22, 2024)
Sec. 849 - Thin Lift Surface Sealing Asphaltic Concrete Mix (August 26, 2025)

Letter Size Plans
Construction Details (Resurfacing & Widening)
Sec. 107 - Legal Regulations and Responsibility to the Public
Sec. 108 - Prosecution and Progress (Subletting Contract) 70%
Sec. 108 - Prosecution and Progress (Waive Progress Schedule)
Sec. 108 - Temporary Suspension of Work
Sec. 108 - Prosecution and Progress (Failure or Delay in Completing Work on Time)
Sec. 150 - Traffic Control
Sec. 231 - Miscellaneous Construction Road Streets and Driveways
Sec. 713 - Organic and Synthetic Material Fiber Blanket (2)

****Project Specific Special Provisions below****

DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA

PLAN OF PROPOSED P. I. NO: M006670 ECHOLS COUNTY

STATE ROUTE 11

M006670 IS LOCATED 100% WITHIN U. S. CONGRESSIONAL DISTRICT NO. 08

M006670 IS LOCATED 100% WITHIN ECHOLS COUNTY

ECHOLS IS COUNTY NO. 101

MID-POINT COORDINATES (X,Y): (386066.213, 239963.852) WEST ZONE

COMPLETED PLANS: OCTOBER 10, 2025

LENGTH OF PROJECT IN MILES

TOTAL

GROSS LENGTH OF PROJECT	5.505
LENGTH OF EXCEPTIONS	0.000
NET LENGTH OF PROJECT	5.505

PRESENT TRAFFIC: 2000 V.P.D. 17% TRUCKS

INDEX

1	COVER SHEET
2	INDEX
3	LOCATION SKETCH
4 – 9	TYPICAL SECTION
10	ROADWAY LOG
11	DETAILED ESTIMATE
12 – 14	GENERAL NOTES
15 – 16	EROSION CONTROL PLANS

PROJECT NO: M006670
SR 11
ECHOLS COUNTY



Statenville

BAY BRANCH RD

END PROJECT AT PAVEMENT JOINT
190 FT +/- SOUTH OF BAY BRANCH RD
MP 5.6/ECHOLS

BEGIN PROJECT AT GEORGIA/FLORIDA STATE
LINE, ECHOLS/HAMILTON COUNTY LINE
MP 0.0/ECHOLS


SR
11

SR
11

SR
11

129 210

TYPICAL SECTION 01

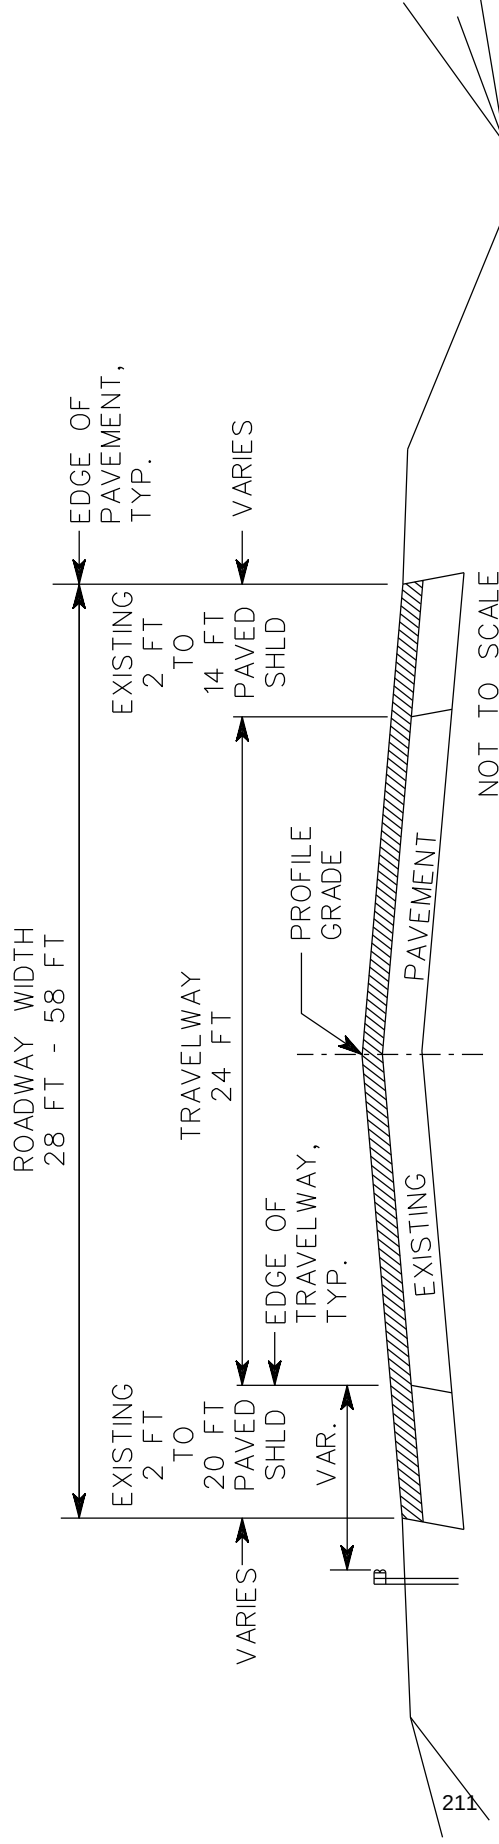

THIS TYPICAL SECTION APPLIES FROM LOG 0.000 TO LOG 0.047


- RESURFACED AREA

MAINTAINING EXISTING CROSS-SLOPE, MILL ROADWAY FULL WIDTH VARIABLE DEPTH (1 1/4 INCHES TYPICAL) TO PROVIDE A SMOOTH TRANSITION AND TIE-IN AT PROJECT START, BRIDGE APPROACH SLABS AND INTO OVERLAID SECTION AND AS DIRECTED BY THE ENGINEER.
RESURFACE ROADWAY FULL WIDTH WITH 135 LBS PER SQUARE YARD RECYCLED ASPHALTIC CONCRETE 9.5 mm SUPERPAVE, TP II, GP 2 ONLY, INCL BITUM MATL & H LIME.

NOTES:

- INSTALL SINUSOIDAL EDGE LINE RUMBLE STRIPS-GROUND IN PLACE (CONTINUOUS), 6 IN AS NOTED IN LOGS.
- INSTALL SINUSOIDAL CENTERLINE RUMBLE STRIPS - GROUND IN PLACE (CONTINUOUS), DOUBLE ROW 6 IN AS NOTED IN LOGS.

TYPICAL SECTION 02

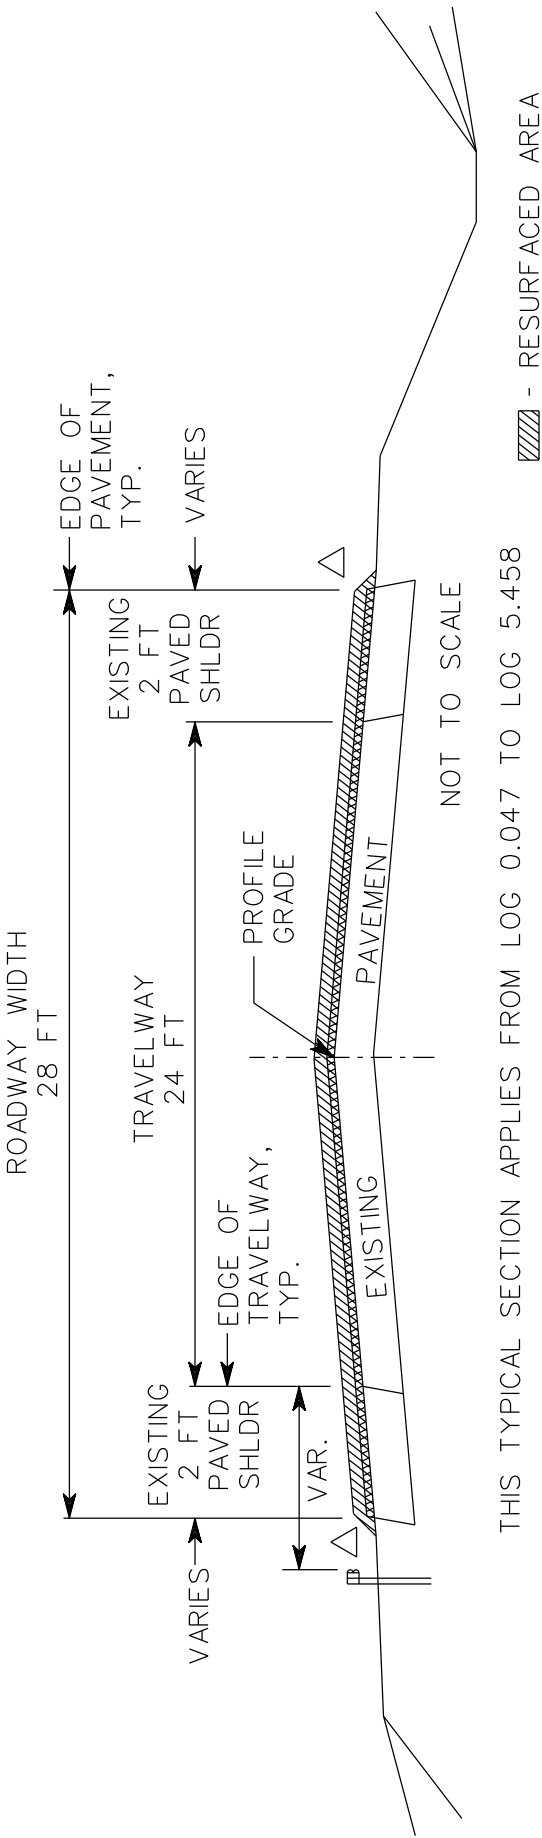

RESURFACED AREA

CRACK RELIEF INTERLAYER ALTERNATE "A" OR "B"

RETAINING EXISTING PAVEMENT AND CROSS-SLOPE, APPLY CRACK RELIEF INTERLAYER ALTERNATE "A" OR "B" TO ROADWAY FULL WIDTH. (SEE DETAILS BELOW)

RESURFACE ROADWAY FULL WIDTH WITH 135 LBS PER SQUARE YARD RECYCLED ASPHALTIC CONCRETE 9.5 mm SUPERPAVE, TP II, GP 2 ONLY, INCL BITUM MATL & H LIME.

CRACK RELIEF INTERLAYER ALTERNATE "A"

APPLY # 7 STONE SINGLE SURFACE TREATMENT TO ROADWAY FULL WIDTH. LEVEL ROADWAY FULL WIDTH WITH 85 POUNDS PER SQUARE YARD LEVELING.

CRACK RELIEF INTERLAYER ALTERNATE "B"

APPLY 1 INCH OG TO ROADWAY FULL WIDTH.

NOTES:


PROVIDE SMOOTH TRANSITION AND TIE-IN AT MILLED SECTIONS.

INSTALL SINUSOIDAL EDGE LINE RUMBLE STRIPS - GROUND IN PLACE (CONTINUOUS), 6 IN AS NOTED IN LOGS.

INSTALL SINUSOIDAL CENTERLINE RUMBLE STRIPS - GROUND IN PLACE (CONTINUOUS), DOUBLE ROW 6 IN AS NOTED IN LOGS.


SEE CONSTRUCTION DETAIL P-7

TYPICAL SECTION 03

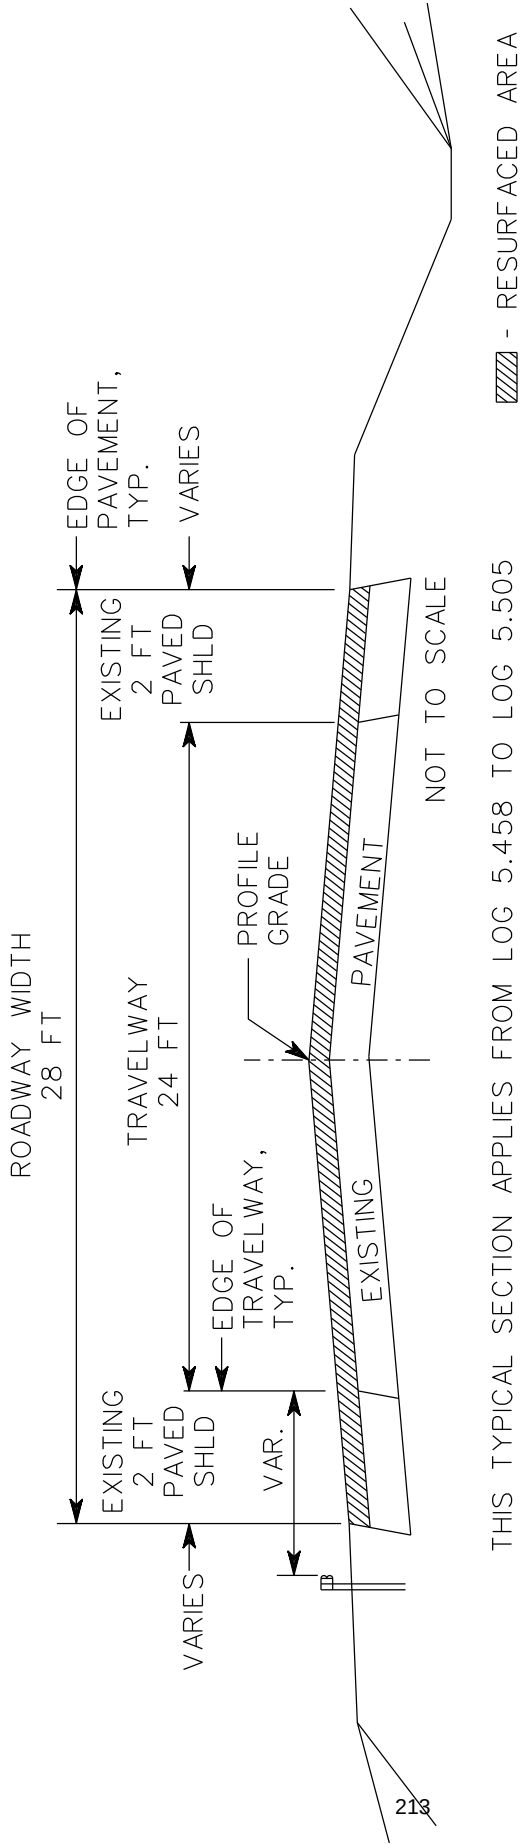

MAINTAINING EXISTING CROSS-SLOPE, MILL ROADWAY FULL WIDTH VARIABLE DEPTH (1 1/4 INCHES TYPICAL) TO PROVIDE A SMOOTH TRANSITION AND TIE-IN TO OVERLAID SECTIONS AND AT PROJECT END AND AS DIRECTED BY THE ENGINEER.
RESURFACE ROADWAY FULL WIDTH WITH 135 LBS PER SQUARE YARD RECYCLED ASPHALTIC CONCRETE 9.5 mm SUPERPAVE, TP II, GP 2 ONLY, INCL BITUM MATL & H LIME.

- NOTES:
- INSTALL SINUSOIDAL EDGE LINE RUMBLE STRIPS - GROUND IN PLACE (CONTINUOUS), 6 IN AS NOTED IN LOGS.
 - INSTALL SINUSOIDAL CENTERLINE RUMBLE STRIPS - GROUND IN PLACE (CONTINUOUS), DOUBLE ROW 6 IN AS NOTED IN LOGS.

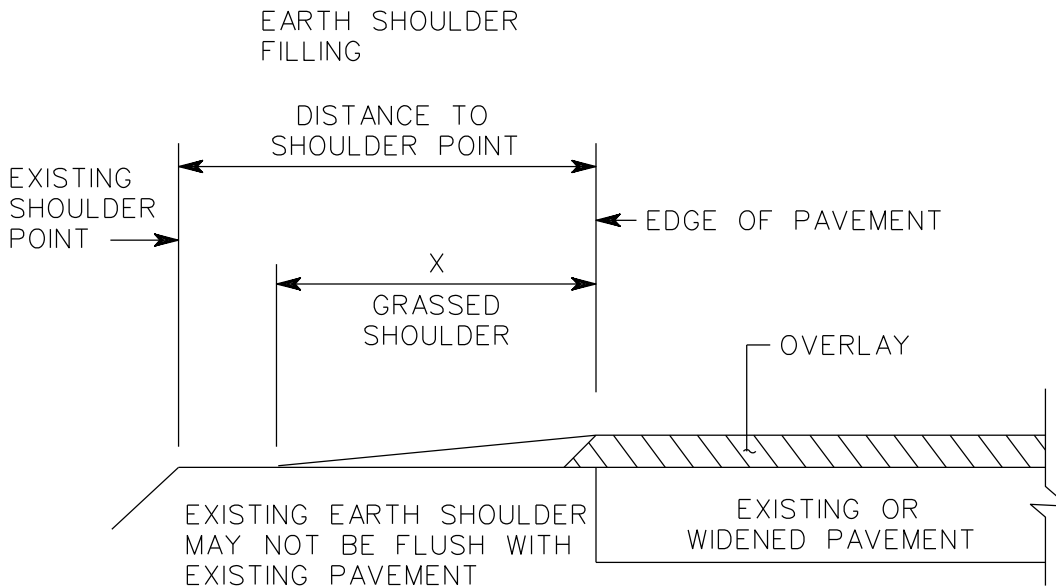

X = 4'-0" OR DISTANCE TO SHOULDER BREAK POINT
TO SLOPE WHICHEVER IS THE LESSER.


TYPICAL SECTION

SHOULDER FILLING
NOT TO SCALE

THIS TYPICAL SECTION APPLIES FROM
LOG 0.047 TO LOG 5.458

- (1) FILL EXISTING EARTH SHOULDER AT VARIABLE DEPTH AS REQUIRED TO PROVIDE A SMOOTH GRADE FROM THE NEW EDGE OF PAVEMENT ELEVATION TYING INTO EXISTING EARTH SHOULDER.
- (2) ALL GRADING, INCLUDING ANY BORROW MATERIAL, SHALL BE INCLUDED IN PRICE BID FOR GRADING PER MILE.


DETAIL FOR UNPAVED ROADS, STREETS AND DRIVES
FOR SURFACING AND WIDENING

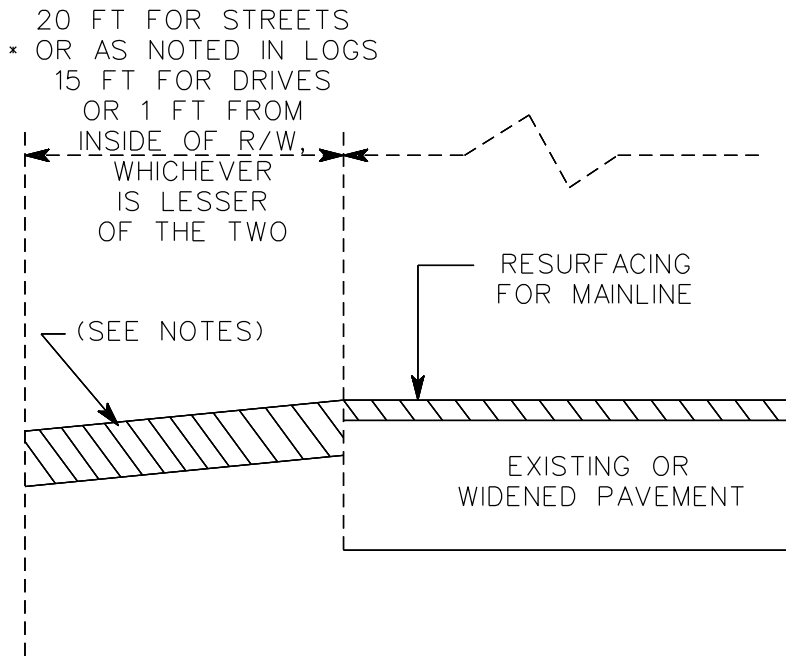

REFERENCE PROJECT SPECIAL PROVISION SECTION 231

REMOVE AND DISPOSE OF EXCAVATED MATERIAL TO A DEPTH OF 4 INCHES
THEN SURFACE WITH 9.5 MM SUPERPAVE AT 440 LBS PER SQUARE YARD.
THE ASPHALT SHALL BE PAID FOR BY THE TON

DETAIL FOR PAVING TURNOUTS FOR SIDE ROADS, STREETS, AND DRIVES

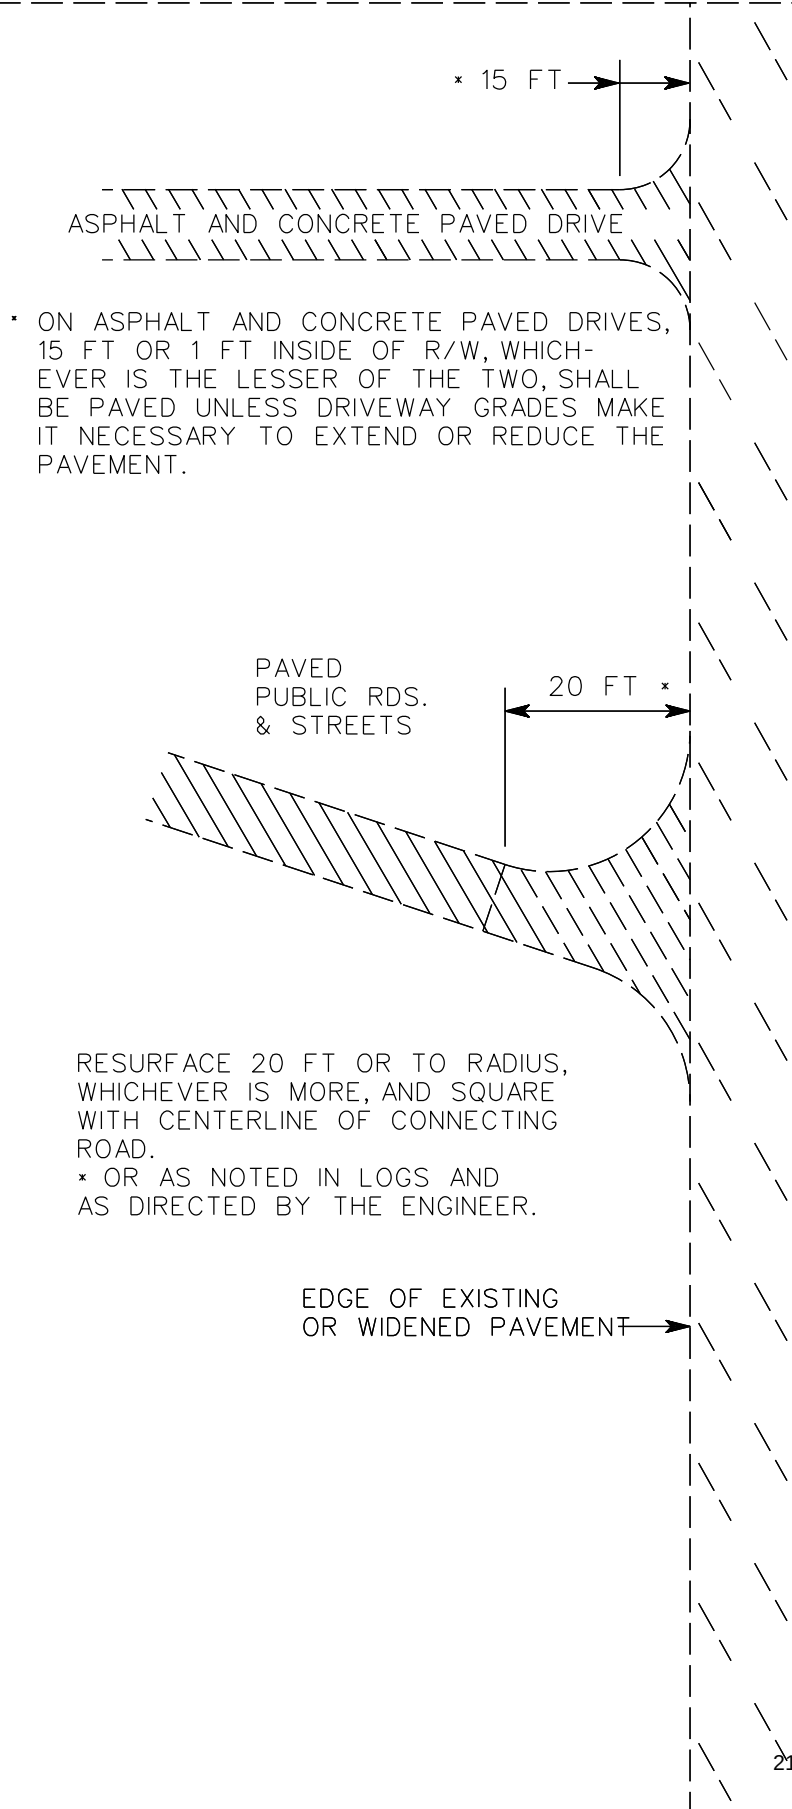

NOTES:

1. THE ENGINEER MAY MODIFY THESE DESIGNS AND THE DEPTH OF LEVELING AND SURFACING MAY VARY AS NECESSARY TO PROVIDE A SMOOTH, SAFE AND WELL DRAINED TRANSITION TO AND FROM PUBLIC ROADS AND DRIVEWAYS.
2. ALL PAVING TURNOUT REQUIREMENTS ARE TO BE MEASURED FROM FINAL EDGE OF PAVEMENT ON MAINLINE.
3. THE CONTRACTOR, AT THE DIRECTION OF THE ENGINEER, SHALL TIE-IN PAVED DRIVES, PUBLIC ROADS AND STREETS WITH 9.5 mm SUPERPAVE MIX NECESSARY TO EFFECT AN ACCEPTABLE TIE-IN. THE WORK SHALL BE PAID FOR UNDER 9.5 mm SUPERPAVE MIX DESIGNATED IN THE DETAILED ESTIMATE.
4. IN THE EVENT ASPHALT AND CONCRETE PAVED DRIVES REQUIRE EXTENSION BEYOND THE DESCRIBED LIMITS TO EFFECT AN ACCEPTABLE TIE-IN, REFERENCE SPECIAL PROVISION SECTION 231.
5. WHEN MILLING IS INCLUDED AS A PAY ITEM, ALL PAVED SIDE STREETS AND ROADS WITHIN THE MILLING LIMITS SHALL BE MILLED VARIABLE DEPTH TO THE BACK OF RADIUS, UNLESS OTHERWISE NOTED IN THE LOG SHEETS. MILLING WILL NOT BE REQUIRED FOR DRIVEWAYS. MILLING TO BE PAID FOR UNDER ITEM 432-.

(MILES)

LOG		ROADWAY WIDTH
0.000	BEGIN PROJECT 3580 FT+/- SOUTH OF CENTERLINE OF STRICKLAND RD AT THE GEORGIA/FLORIDA STATE LINE BEGIN FULL WIDTH VARIABLE DEPTH MILLING (1 ¼ INCHES TYPICAL) BEGIN FULL WIDTH 135 POUNDS PER SQUARE YARD 9.5 MM RESURFACING PROVIDE SMOOTH TRANSITION AND TIE-IN BEGIN SINUSOIDAL EDGELINE RUMBLE STRIPS – GROUND IN PLACE CONTINUOUS, 6 IN, LEFT & RIGHT BEGIN SINUSOIDAL CENTERLINE RUMBLE STRIPS – GROUND IN PLACE (CONTINUOUS), DOUBLE ROW 6 IN BEGIN THERMOPLASTIC MARKINGS BEGIN RAISED PAVEMENT MARKERS 2-12 FT TRAVEL LANES BEGIN 20 FT ASPHALT PAVED SHOULDER LEFT BEGIN 14 FT ASPHALT PAVED SHOULDER RIGHT 58 FT OF ASPH CONC PVMT (MP 0.000/ECHOLS CO.)	58
.0.019	WIDTH CHANGE END 20 FT ASPHALT PAVED SHOULDER LEFT END 14 FT ASPHALT PAVED SHOULDER RIGHT BEGIN 2 FT ASPHALT PAVED SHOULDERS LEFT & RIGHT 2-12 FT TRAVEL LANES	28
0.047	END MILLING BEGIN FULL WIDTH CRACK RELIEF INTERLAYER ALTERNATE “A” (SINGLE SURFACE TREATMENT WITH 85 POUNDS PER SQUARE YARD LEVELING) OR ALTERNATE “B” (ONE INCH OGI) CONTINUE FULL WIDTH 9.5 MM RESURFACING BEGIN 4 FT EARTH SHOULDER FILLING LT & RT PROVIDE SMOOTH TRANSITION BETWEEN MILLED AREA AND OVERLAID AREA	28
0.680	STRICKLAND ROAD, LEFT, UNPAVED	
1.270	BRADFORD ROAD, RIGHT, UNPAVED	
2.190	STRICKLAND ROAD, LEFT, UNPAVED	
3.940	QUINTON ROAD, RIGHT, UNPAVED	
4.440	HESTER ROAD, RIGHT, UNPAVED	
5.362	BEN DANIELS FARM ROAD, LEFT, PAVED	
5.458	END CRACK RELIEF INTERLAYER “A” OR “B” BEGIN FULL-WIDTH VARIABLE DEPTH MILLING (1 ½ INCHES TYPICAL) PROVIDE SMOOTH TRANSITION AT TIE-IN BETWEEN OVERLAID AREA AND MILLED AREA END 4 FT EARTH SHOULDER FILLING LT & RT	
5.505	END PROJECT, 190 FT +/- SOUTH OF BAY BRANCH ROAD PROVIDE SMOOTH TIE-IN AND TRANSITION (MP 5.6/ECHOLS CO)	28
5.540	BAY BRANCH ROAD RIGHT PAVED (REFERENCE ONLY)	

DETAILED ESTIMATE

ITEM NO.	DESCRIPTION	UNIT	QUANTITY
150-1000	TRAFFIC CONTROL – M006670	LS	1
163-0232	TEMPORARY GRASSING	AC	2.692
210-0200	GRADING PER MILE	LM	5.505
231-1250	MISCELLANEOUS CONSTRUCTION, UNPAVED ROADS, STREETS & DRIVEWAYS	EA	51
402-1802	RECYCLED ASPH CONC PATCHING, INCL BITUM MATL & H LIME	TN	100
402-3103	RECYCLED ASPH CONC 9.5 mm SUPERPAVE, TYPE II, GP 2 ONLY, INCL BITUM MATL & H LIME	TN	7771
413-0750	TACK COAT	GL	7476
432-5010	MILL ASPH CONC PVMT, VARIABLE DEPTH	SY	1888
456-2070	SINUSOIDAL SHOULDER RUMBLE STRIPS – GROUND IN PLACE CONTINUOUS, 6 IN	GLM	11.01
456-2078	SINUSOIDAL CENTERLINE RUMBLE STRIPS – GROUND IN PLACE (CONTINUOUS), DOUBLE ROW 6 IN	GLM	5.505
653-1704	THERMOPLASTIC SOLID TRAF STRIPE, 24 IN, WHITE	LF	72
653-2603	THERMOPLASTIC SOLID TRAF STRIPE, 6 IN WHITE	LM	11.104
653-2606	THERMOPLASTIC SKIP TRAF STRIPE, 6 IN, YELLOW	GLM	5.505
654-1001	RASIED PVMT MARKERS TP 1	EA	750
700-6910	PERMANENT GRASSING	AC	5.339
700-7000	AGRICULTURAL LIME	TN	10.678
700-8000	FERTILIZER MIXED GRADE	TN	1.068
700-8100	FERTILIZER NITROGEN CONTENT	LB	267
713-3011	WOOD FIBER BLANKET, TP I, SHOULDERS	SY	500
713-3012	WOOD FIBER BLANKET, TP II, SHOULDERS	SY	25837
	ALTERNATE “A”		
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
402-1812	RECYCLED ASPH CONC LEVELING, INCL BITUM MATL & H LIME	TN	4042
424-5107	SINGLE SURFACE TRTMT, STN SIZE 7, GP 2 ONLY	SY	95107
	ALTERNATE “B”		
ITEM NO.	DESCRIPTION	UNIT	QUANTITY
413-0750	TACK COAT	GL	6658
415-5000	ASPHALTIC CONCRETE OPEN GRADED CRACK RELIEF INTERLAYER, GP 2 ONLY, INCL BITUM MATL & H LIME	TN	4755

GENERAL NOTES

1. ALL REFERENCES IN THIS DOCUMENT, WHICH INCLUDES ALL PAPERS, WRITINGS, DOCUMENTS, DRAWINGS, OR PHOTOGRAPHS USED, OR TO BE USED, IN CONNECTION WITH THIS DOCUMENT, TO THE STATE HIGHWAY DEPARTMENT OF GEORGIA, STATE HIGHWAY DEPARTMENT, GEORGIA STATE HIGHWAY DEPARTMENT, HIGHWAY DEPARTMENT, OR DEPARTMENT WHEN THE CONTEXT THEREOF MEANS THE STATE HIGHWAY DEPARTMENT OF GEORGIA, SHALL BE DEEMED TO MEAN, THE GEORGIA DEPARTMENT OF TRANSPORTATION.
2. THE DATA, TOGETHER WITH ALL OTHER INFORMATION SHOWN ON THESE PLANS, OR IN ANY WAY INDICATED THEREBY, WHETHER BY DRAWINGS OR NOTES, OR IN ANY OTHER MANNER, ARE BASED UPON FIELD INVESTIGATIONS AND ARE BELIEVED TO BE INDICATIVE OF ACTUAL CONDITIONS. HOWEVER, THE SAME ARE SHOWN AS INFORMATION ONLY, ARE NOT GUARANTEED AND DO NOT BIND THE DEPARTMENT OF TRANSPORTATION IN ANY WAY. THE ATTENTION OF THE BIDDER IS SPECIFICALLY DIRECTED TO SECTIONS 102.04, 102.05, AND 104.03 OF THE SPECIFICATIONS.
3. THESE PLANS HAVE BEEN PREPARED IN ACCORDANCE WITH THE 2025 CONSTRUCTION STANDARDS AND DETAILS BOOK AND ATTACHED APPLICABLE REVISIONS. THE 2025 CONSTRUCTION STANDARDS AND DETAILS BOOK IS AVAILABLE AT:
<http://mydocs.dot.ga.gov/info/gdotpubs/ConstructionStandardsAndDetails/Forms/AllItems.aspx>
ANY REVISIONS CONTAINED WITHIN THIS PLAN SET SUPERSEDE THE 2025 CONSTRUCTION STANDARDS AND DETAILS BOOK WHICH THEY REVISE OR IN WHICH THERE IS A CONFLICT.
4. IN PREPARATION OF THE ROADWAY PRIOR TO RESURFACING, BLADE THE EXISTING SHOULDERS NO LOWER IN ELEVATION THAN THE EXISTING PAVEMENT OR SHOULDER. SHOULDER MATERIAL DISPLACED BY THE CLEANING OPERATION PRIOR TO RESURFACING SHALL BE REMOVED AND DISPOSED OF AT AN APPROVED DISPOSAL SITE OFF D.O.T. RIGHT-OF-WAY. THE COST OF THIS WORK SHALL BE INCLUDED IN THE OVERALL BID PRICE.
5. FULL WIDTH DESIGNATIONS NOTED IN TYPICAL SECTIONS, ROADWAY LOGS AND NOTES ARE TO BE FROM EDGE OF PAVEMENT TO EDGE OF PAVEMENT WHICH INCLUDES MAINLINE LANES, TURN LANES, INSIDE SHOULDER, OUTSIDE SHOULDER, GORE AREAS, MEDIAN CROSSOVERS, AND RAMP LANES. ALL WORK TO BE COMPLETED AS DESIGNATED IN THE PLANS AS FULL WIDTH SHALL COVER ALL THESE AREAS.
6. QUANTITIES FOR TURNOUTS, FLARES, ETC., ARE INCLUDED ON THE DETAILED ESTIMATE.
7. FLARES TO BE RESURFACED WILL REQUIRE NO ADDITIONAL BASE MATERIAL.
8. THE PAVING OPERATION, EXCLUDING PATCHING, WILL BE COMPLETED WITHIN NINETY (90) CALENDAR DAYS UPON START OF THE PAVING OPERATION. FAILURE TO COMPLETE PAVING OPERATION WITHIN THE SPECIFIED TIME WILL RESULT IN LIQUIDATED DAMAGES TO BE ASSESSED IN ACCORDANCE WITH SUBSECTION 108.08 OF THE SPECIFICATIONS.
9. IN MILLED AREAS, ALL PATCHING SHALL BE FULL LANE WIDTH AT A SIX (6) INCH DEPTH AT LOCATIONS DESIGNATED BY THE ENGINEER BEFORE PERFORMING MILLING AND RESURFACING OPERATIONS.
10. IN NON-MILLED AREAS, ALL PATCHING SHALL BE FULL LANE WIDTH BEFORE PERFORMING RESURFACING LAYERS AT LOCATIONS DESIGNATED BY THE ENGINEER.
11. WHEN SURFACE TREATMENT OR OPEN GRADED INTERLAYER IS INCLUDED AS A PAY ITEM, THE CONTRACTOR, SHALL TIE-IN PAVED DRIVES, PUBLIC ROADS AND STREETS WITH 9.5 MM SUPERPAVE MIX NECESSARY TO ACHIEVE AN ACCEPTABLE TIE-IN.

GENERAL NOTES (CONTINUED)

13. COVER SURFACE TREATMENT AREAS OF THE ROADWAY WITH THE ASPHALT LEVELING COURSE THE SAME DAY AS TREATED AND PRIOR TO OPENING LANES TO TRAFFIC. FAILURE TO COVER THE SURFACE TREATMENT AREAS WITH ASPHALT LEVELING COURSE ON THE SAME DAY AS TREATED AND PRIOR TO OPENING THE LANES TO TRAFFIC WILL RESULT IN LIQUIDATED DAMAGES TO BE ASSESSED IN ACCORDANCE WITH SUBSECTION 108.08 OF THE SPECIFICATIONS.
14. PROVIDE POSITIVE DRAINAGE IN THE MILLING OPERATION TO ENSURE WATER DOES NOT POND ON THE ROADWAY.
15. MILLED AREAS WILL BE COVERED WITH FINAL SURFACE COURSE WITHIN THREE (3) CALENDAR DAYS OF BEING MILLED. FAILURE TO COVER MILLED AREAS AS SPECIFIED WILL RESULT IN LIQUIDATED DAMAGES TO BE ASSESSED IN ACCORDANCE WITH SPECIAL PROVISION SUBSECTION 150.7.01 OF THE SPECIFICATIONS.
16. ALL DRAINAGE STRUCTURES WITHIN THE LIMITS OF THE PROJECT WILL BE MAINTAINED THROUGHOUT THE DURATION OF THE PROJECT. ANY DEBRIS THAT GOES IN DRAINAGE STRUCTURES AS A RESULT OF THE MILLING OPERATION WILL BE CLEANED OUT AT NO ADDITIONAL COST TO THE DEPARTMENT.
17. CONSTRUCT SINUSOIDAL EDGELINE RUMBLE STRIPS-GROUND IN PLACE, 6 INCH, AT LOCATIONS AS NOTED IN LOG SHEETS IN ACCORDANCE WITH CONSTRUCTION DETAILS T-35 AND T-36.
18. CONSTRUCT SINUSOIDAL CENTERLINE RUMBLE STRIPS-GROUND IN PLACE (CONTINUOUS), DOUBLE ROW 6 INCH, AT LOCATIONS AS NOTED IN LOG SHEETS IN ACCORDANCE WITH CONSTRUCTION DETAILS T-33 AND T-34.
19. RESTRIPE ALL EXISTING ROADWAY MARKINGS AT EXISTING LOCATIONS ON ROADWAY AND AS CURRENTLY MARKED. EXISTING CROSSWALKS SHALL BE STRIPED IN ACCORDANCE WITH CROSSWALK DETAIL ON CONSTRUCTION DETAIL T-11A. RESTRIPE ALL EXISTING ROADWAY MARKINGS ON SIDE ROADS TO THE END OF THE NEW RESURFACED SECTION. RESTRIPE OR PAINT (WHERE NOT EXISTING) STOP BARS AT ALL PAVED SIDE ROADS AND STREETS.
20. TEMPORARY STRIPING IS REQUIRED IN ACCORDANCE WITH SECTION 150.2.08 AND 150.3.10 OF THE GEORGIA SPECIFICATIONS. PLACEMENT OF PERMANENT PAVEMENT MARKINGS SHALL NOT BEGIN UNTIL FINAL SURFACE COURSE HAS BEEN COMPLETED FOR FIFTEEN (15) CALENDAR DAYS.
21. REHABILITATE THE EARTH SHOULDERS IN ACCORDANCE WITH DETAILS AND NOTES IN THE PLANS. THE FILLING SHALL INCLUDE GRADING, FURNISHING AND PLACEMENT OF BORROW MATERIAL. FILLING WORK SHALL BE PERFORMED AND PAID FOR IN ACCORDANCE WITH SECTION 210 OF THE SPECIFICATIONS EXCEPT AS NOTED IN DETAILS.
22. COMPLETE EARTH SHOULDER FILLING WORK WITHIN THIRTY (30) CALENDAR DAYS, AFTER COMPLETION OF RESURFACING ROADWAY. FAILURE TO COMPLETE EARTH SHOULDER FILLING WORK WITHIN THIS TIME FRAME WILL RESULT IN LIQUIDATED DAMAGES ASSESSED IN ACCORDANCE WITH SECTION 108.08 OF THE SPECIFICATIONS.
23. PROPERLY INSTALL EROSION CONTROL DEVICES AT ALL AREAS OF EARTH SHOULDER FILLING WORK. EROSION CONTROL SHALL BE PERFORMED AND PAID FOR IN ACCORDANCE WITH SECTION 161 OF THE SPECIFICATIONS.
24. GRASS ALL AREAS OF EARTH SHOULDER FILLING. GRASSING SHALL BE PERFORMED AND PAID FOR IN ACCORDANCE WITH SECTION 700 OF THE SPECIFICATIONS.

GENERAL NOTES (CONTINUED)

25. ALL BORROW AND WASTE SITES FOR THIS PROJECT SHALL BE ENVIRONMENTALLY APPROVED PRIOR TO CONSTRUCTION ACTIVITIES OCCURRING IN THEM. ALL COMMON FILL OR EXCESS MATERIAL DISPOSED OUTSIDE THE PROJECT RIGHT OF WAY SHALL BE PLACED IN EITHER A PERMITTED SOLID WASTE FACILITY, A PERMITTED INERT WASTE LANDFILL OR IN AN ENGINEERED FILL. SEE SECTION 201 OF THE STANDARD SPECIFICATION AND SUPPLEMENTS THERETO FOR ADDITIONAL INFORMATION.
26. THERE IS NO KNOWN SUITABLE PLACE TO BURY THE EXISTING CONSTRUCTION DEBRIS WITHIN THE PROJECT'S LIMITS. THE CONTRACTOR SHALL PROVIDE AN ENVIRONMENTALLY APPROVED SITE AS SHOWN IN GA. SPECIFICATION 201 TO DISPOSE OF THE EXISTING CONSTRUCTION DEBRIS AT NO ADDITIONAL COST TO THE DEPARTMENT.
27. WHEN ESAs ARE SHOWN ON THE PLANS, ENSURE THAT ALL CONSTRUCTION RELATED ACTIVITIES IN PLACES ADJACENT TO ENVIRONMENTALLY SENSITIVE AREAS (ESAs) (EASEMENTS, STAGING, VEHICULAR USE, BORROW OR WASTE ACTIVITIES, CONSTRUCTION TRAILER PLACEMENT AND STAGING) BE RESTRICTED TO THE EXISTING RIGHT-OF-WAY.
28. THERE ARE NO ADDITIONAL ENVIRONMENTAL RESOURCE IMPACTS INCLUDED IN THIS PROJECT.
29. THIS PROJECT DOES NOT REQUIRE A NOI.
30. NOTIFY UTILITY COMPANIES A MINIMUM SIXTY (60) DAYS IN ADVANCE OF ANY PROPOSED WORK IN ORDER FOR UTILITY COMPANIES TO BEGIN CLEARING CONFLICTS WITH SCHEDULED WORK. MILLING AROUND MANHOLES AND VALVES WILL BE ALLOWED IN ORDER TO MEET THE CONTRACT COMPLETION DATES, THESE AREAS SHALL BE COVERED WITH THE FINAL SURFACE COURSE THE SAME DAY AT NO ADDITIONAL COST TO THE DEPARTMENT.

**DEPARTMENT OF TRANSPORTATION
STATE OF GEORGIA
SPECIAL PROVISION**

**P.I. No.: M006670
ECHOLS COUNTY**

SECTION 108 - PROSECUTION AND PROGRESS

Retain Sub-Section 108.08 as written and add the following:

108.08. Failure or Delay in Completing Work on Time

C. Intermediate Completion

An overall Completion Date is established for this Project.

For this project the following item of work and corresponding intermediate time is required:

1. Complete Paving Operations

Failure to complete all paving operations, excluding patching, (e.g., shoulder clipping, asphalt shoulder widening, milling, leveling, resurfacing, etc.) within ninety (90) calendar days, from the start date of any of the paving operations, will result in the assessment of Liquidated Damages at a rate of \$500.00 per calendar day.

2. Earth Shoulder Rehabilitation

Failure to complete earth shoulder filling work within thirty (30) Calendar days after completion of paving operations of the roadway will result in the assessment of Liquidated Damages at a rate of \$500.00 per Calendar day.

3. Single Layer Surface Treatment

Failure to cover the surface treated areas with the leveling course the same day and prior to opening the lanes to traffic will result in the assessment of Liquidated Damages at a rate of \$1,000.00 per calendar day.

The above rates are cumulative and are in addition to any Liquidated Damages which may be assessed for failure to complete the overall project.